


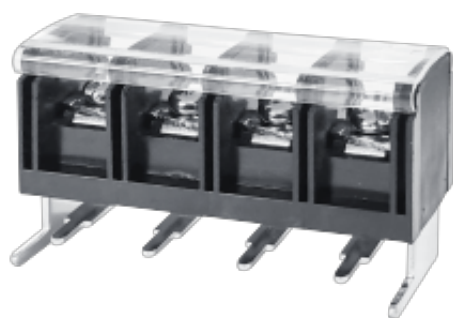

For reference only!version1.0

Material

Screws	M4 , Steel , Ni plated
Pin Header	Copper alloy , Sn plated
Housing	PA66 , UL94V-0

Electrical

Standard	UL
Rated Voltage	600V
Rated current	40A
Wire range	18-10AWG
Contact Resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC 2200V/1Min

Other Data

Pitch/Poles [mm]/[P]	13.0/2-20
Operating temperature [°C]	-40°C~+105°C
Torque	1.2Nm

Dimensions

PCB opening diagram

