




Electrical Diagram :

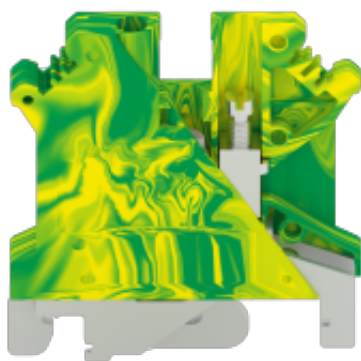

For reference only!version1.0

CUL Technical Data (UL1059)

Wire Range	24-8
------------	------

IEC Technical Data (IEC 60947-7-2)

Overvoltage Category	III
Contamination Class	3

Conductor cross section

Soild	0.2-10.0mm ²
Flexible	0.2-6.0mm ²
Flexible with ferrule	0.2-6.0mm ²

Material


Insulation Material	PA66
Flame relardant rating	UL94V-0

Other Data


Connection Points	2
-------------------	---

Stripping Length [mm]	10
Type of rail	DIN 35 / DIN 32
Screw/Torque(Max)[N.m]	M4/1.5-1.8
Operating temperature [°C]	-40°C~+105°C
Length/Height/Thickness [mm]	42.9/45.8/8.2


Dimensions

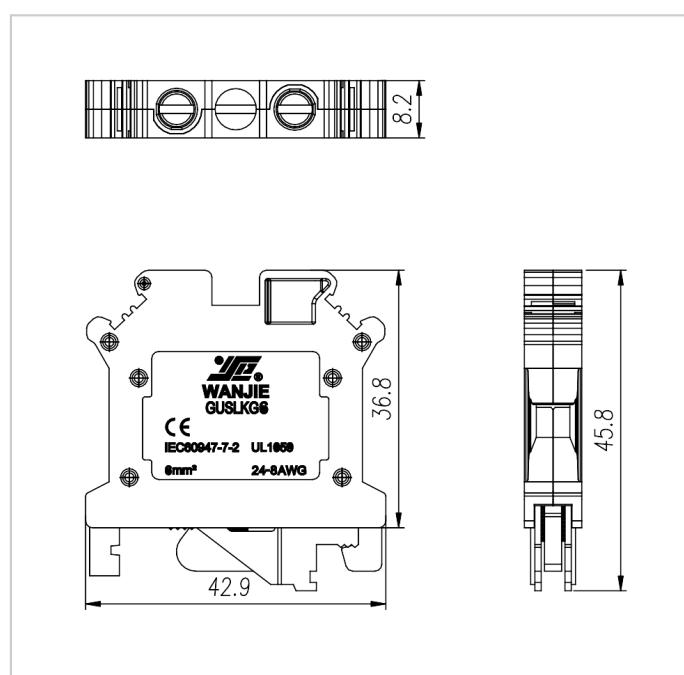

Accessories




[EB-35](#)




[EW-35](#)



[DGL2-35x7.5A](#)




[DGL2-35x7.5B](#)




[DGL2-35x7.5C](#)




[DGL2-35x7.5D](#)



[MUV6-10](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)

[DGS1-35x7.5W](#)

[EC-35](#)