


GUT4-102

GUT STEEL WIRE FRAME TERMINAL BLOCK

Download date : 2025-12-06

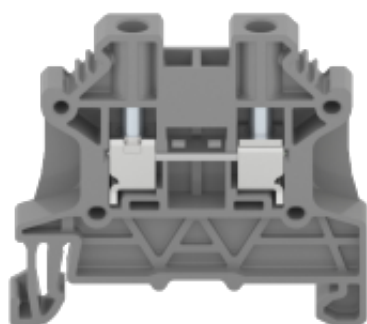

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	600	600	600
Rated Current [A]	30	30	5
Wire Range	26-10		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	1000V
Rated Current [A]	32A
Impulse withstand voltage	8KV

Conductor cross section

Soild	0.2-6.0mm ²
Flexible	0.2-4.0mm ²
Flexible with ferrule	0.25-4.0mm ²

Material

GUT4-102

GUT STEEL WIRE FRAME TERMINAL BLOCK

Download date : 2025-12-06



Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Length/Height/Thickness [mm]	44.0/40.0/6.2
Stripping Length [mm]	8-9
Screw/Torque(Max)[N.m]	M3/0.5-0.6

Dimensions

