


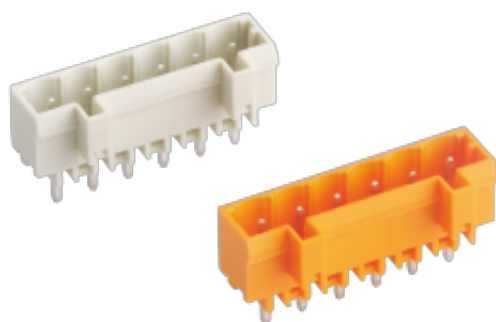

MCS terminal Block

Rated current: 15 A

Rated voltage: 300 V

Pitch: 5.0 mm/5.08 mm



For reference only!version1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]	/		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	320	320	630
Rated Current [A]	12	12	12
Impulse withstand voltage [KV]	4	4	4
Conductor cross section[solid/flexible] [mm²]	/		

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0


Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data


Pitch/Poles [mm]/[P]	5.0 , 5.08/2-24
Stripping Length [mm]	/
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105
Soldering temperature	260°C/5S
Pin dimensions [mm]	1.0*1.0
PCB Hole Diameter [mm]	Ø1.5

Dimensions


PCB opening diagram

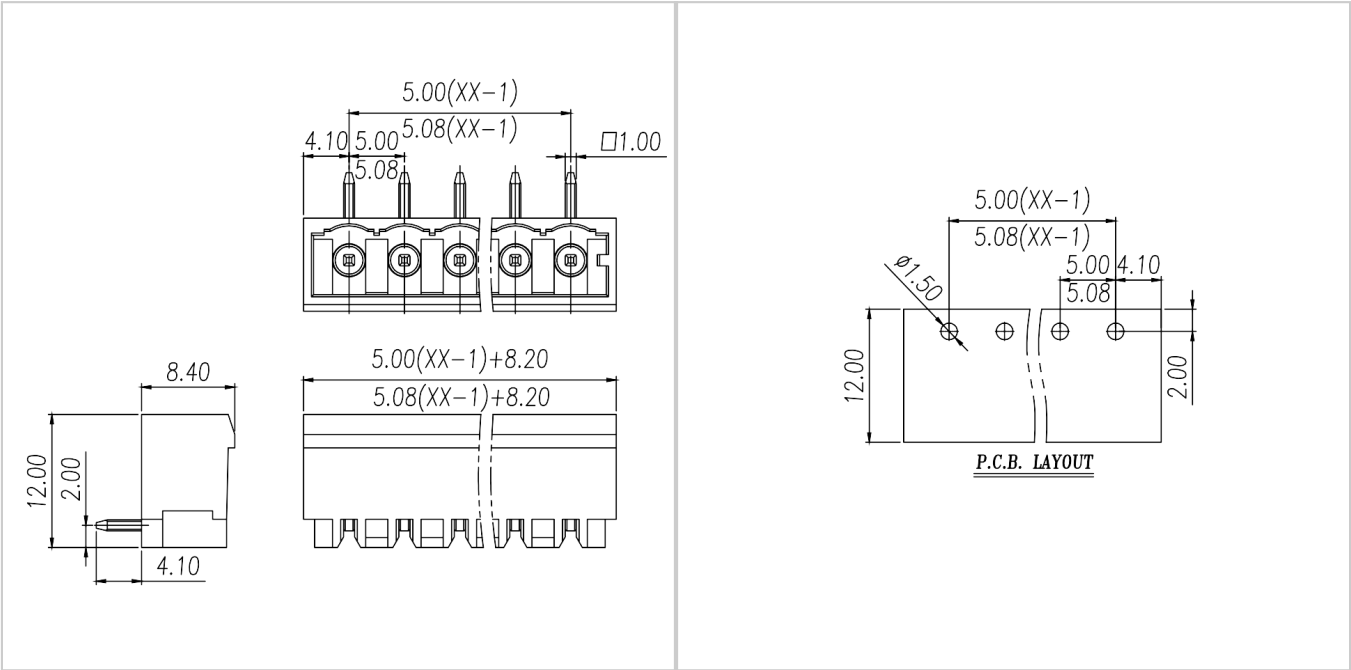


Accessories




[WJ0401/0501-02XX](#)



[WJ0401/0501-04XX](#)




[WJ0401/0501-06XX](#)




[WJ0401/0501-08XX](#)

[WJ0405/0505-02XX](#)

[WJ0405/0505-04XX](#)



[WJ0406-02XX](#)



[WJ0406-04XX](#)



[WJ0406-06XX](#)