


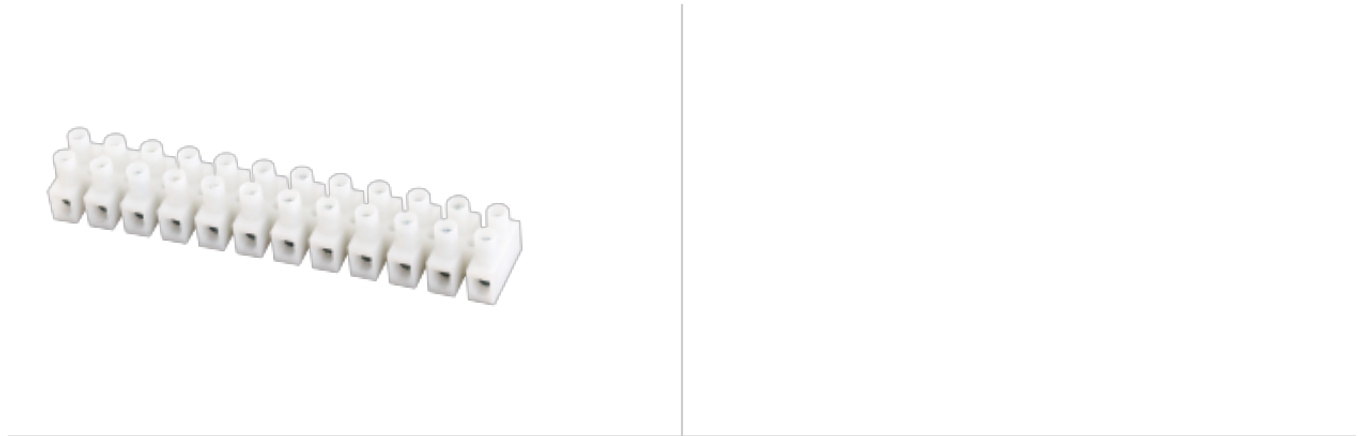

For reference only!version1.0

Material

Housing	PA66 , UL94V-2
Screws	M3 , Steel , Zn plated
Pressure line column	Copper alloy , Ni plated

Electrical

Standard	UL	IEC
Rated Voltage	300V	450V
Rated current	30A	24A
Wire range	20-10AWG	4.0mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1600V/1Min	
Temp.range	-40℃~+105℃	
Torque	0.5Nm/4.5Lb.in/5.1Kgf.cm	

Dimensions



MY10HW-1.2

FEED THROUGH TERMINAL BLOCK

Download date : 2025-12-06

