

WJ15EDGKSHM-3.5
PLUG-IN TERMINAL BLOCK

Download date : 2025-12-06



	PCB connector Rated current: 7 A Rated voltage: 150 V Wire range: 28-18 AWG Pitch: 3.5 mm
---	--

	For reference only!version1.0
---	-------------------------------

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	150	-	150
Rated Current [A]	7	-	7
Wire Range [AWG]	28-18		
Dielectric Voltage-Withstand	1.3KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	80	160	200
Rated Current [A]	10	10	10
Impulse withstand voltage [KV]	1.5	2.5	2.5
Conductor cross section[solid/flexible] [mm²]	0.2-1.0		

Material


Insulation Material	PA66
---------------------	------

Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	3.5/2*2-2*24
Stripping Length [mm]	7-8
Screw/Torque(Max)[N.m]	/
Operating temperature [°C]	-40~+105
Soldering temperature	/
Pin dimensions [mm]	/
PCB Hole Diameter [mm]	/


Dimensions

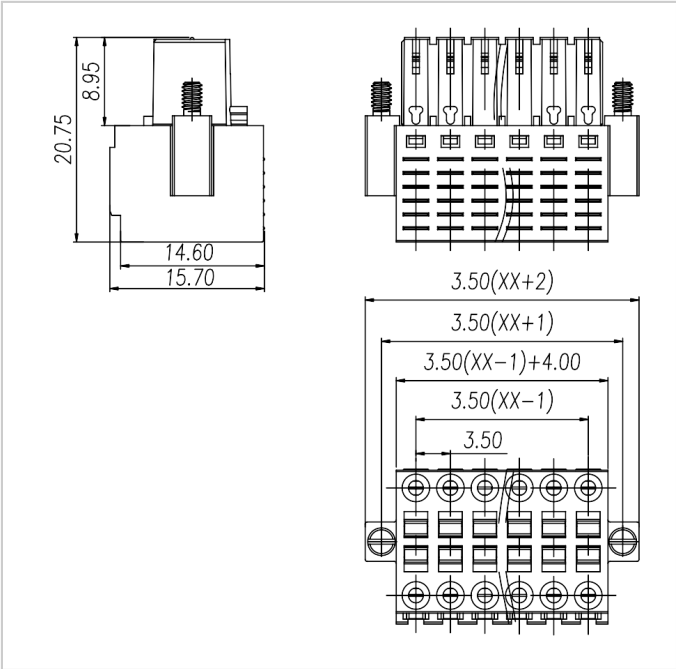


Accessories




[WJ15EDGVHSM-3.5](#)



[WJ15EDGRHSM-3.5](#)



[WJ15EDGVHSM-THR-3.5](#)



[WJ15EDGRHSM-THR-3.5](#)