

For reference only!version1.0

CUL Technical Data (UL1059)

Use Group	B	C	D
Rated Voltage [V]	300	300	600
Rated Current [A]	15	15	5
Wire Range	26-14AWG		

IEC Technical Data (IEC 60947-7-1)

Overvoltage Category	III
Contamination Class	3
Rated Voltage [V]	500V
Rated Current [A]	16A
Impulse withstand voltage	6KV

Conductor cross section

Soild	0.2-1.5mm ²
Flexible	0.2-1.5mm ²
Flexible with ferrule	0.2-1mm ²

Material

GUV1.5-202

GUV Push-in terminal block

Download date : 2025-12-06




Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	65.6/41.1/3.5
Stripping Length [mm]	8-10
Approval	/

Dimensions

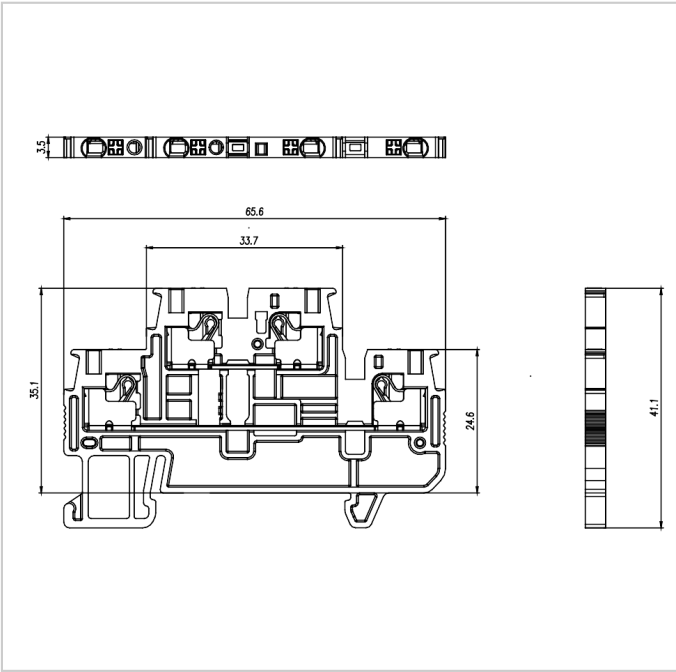


Accessories




[FUVA1.5-XX](#)




[DUV1.5-202](#)



[PUV1.5-144](#)



[EB-35](#)



[EW-35](#)



[DGS1-35x7.5W4.2x12](#)



[DGS1-35x7.5W5.2x15](#)



[DGS1-35x7.5W](#)



[DGL2-35x7.5A](#)



[DGL2-35x7.5B](#)



[DGL2-35x7.5C](#)



[DGL2-35x7.5D](#)