




电路图：

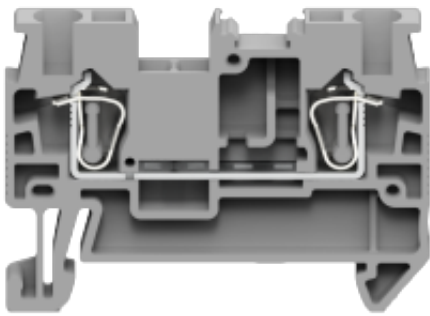

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术参数-UL ( 1059 )

|                          |            |     |     |
|--------------------------|------------|-----|-----|
| 等级 Use Group             | B          | C   | D   |
| 额定电压 Rated Voltage [V]   | 600        | 600 | 600 |
| 额定电流 Rated Current [A]   | 20         | 20  | 5   |
| 耐电压 Withstanding Voltage | 2200V/1Min |     |     |
| 接线范围 Wire Range          | 26-12AWG   |     |     |

技术参数-IEC(60947-7-1)

|                                  |      |
|----------------------------------|------|
| 过电压类别 Overvoltage Category       | III  |
| 污染等级 Contamination Class         | 3    |
| 额定电压 Rated Voltage               | 800V |
| 额定电流 Rated Current               | 24A  |
| 额定冲击电压 Impulse withstand voltage | 8KV  |

导线截面积 Conductor cross section

|                                |                        |
|--------------------------------|------------------------|
| 单芯 Solid                       | 0.2-4mm <sup>2</sup>   |
| 柔性导线 Flexible                  | 0.2-2.5mm <sup>2</sup> |
| 柔性导线带冷压头 Flexible with ferrule | 0.2-2.5mm <sup>2</sup> |


材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |


一般参数 Other Data

|                                    |               |
|------------------------------------|---------------|
| 长/高/厚 Length/Height/Thickness [mm] | 48.8/35.4/5.2 |
| 连接点数 Connection Points             | 2             |
| 剥线长度 Stripping Length [mm]         | 8-10          |
| 导轨类型 Type of rail                  | DIN 35        |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]       | /             |
| 工作温度 Operating temperature [°C]    | -40~+105      |


尺寸图

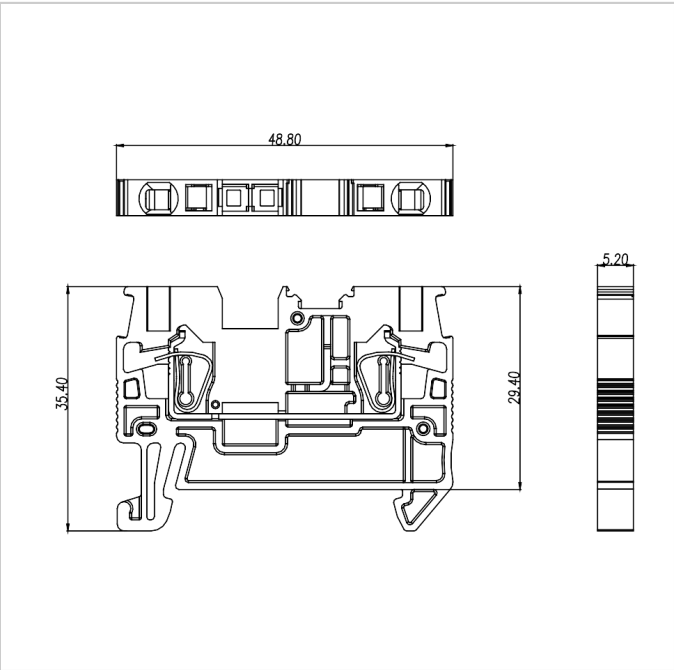


配件




MUV2.5-10




PUV2.5-96



FUVA2.5-XX




EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B




DGL2-35x7.5C



DGL2-35x7.5D



DUV2.5-102



DGS1-35x7.5W4.2x12



DGS1-35x7.5W5.2x15



DGS1-35x7.5W