


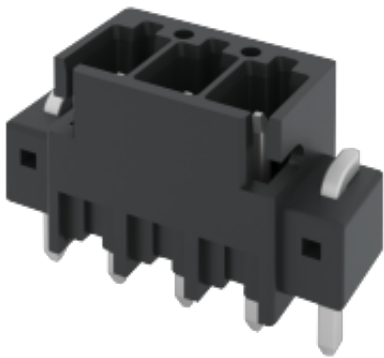

插拔式连接器

额定电流: 6 A

额定电压: 150 V

间距: 2.54 mm

安装: 回流焊

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

|                                  |       |    |   |
|----------------------------------|-------|----|---|
| 等级 Use Group                     | B     | C  | D |
| 额定电压 Rate Voltage [V]            | 150   | 50 | - |
| 额定电流 Rated Current [A]           | 6     | 6  | - |
| 接线范围 Wire Range [AWG]            | -     |    |   |
| 耐电压 Dielectric Voltage-Withstand | 1.3KV |    |   |

技术参数-IEC

|                                          |     |     |     |
|------------------------------------------|-----|-----|-----|
| 过电压类别 Overvoltage Category               | III | III | II  |
| 污染等级 Contamination Class                 | 3   | 2   | 2   |
| 额定电压 Rated Voltage [V]                   | 32  | 160 | 160 |
| 额定电流 Rated Current [A]                   | 6   | 6   | 6   |
| 额定冲击电压 Impulse withstand voltage [KV]    | 2.5 | 2.5 | 2.5 |
| 导线截面积[硬/柔] Conductor cross section [mm²] | -   |     |     |

材料 Material


|                          |     |
|--------------------------|-----|
| 绝缘材料 Insulation Material | LCP |
|--------------------------|-----|

|                                     |              |
|-------------------------------------|--------------|
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Data

|                                 |              |
|---------------------------------|--------------|
| 间距/极数 Pitch/Poles [mm]/[P]      | 2.54/2-24    |
| 剥线长度 Stripping Length [mm]      | -            |
| 螺丝/扭矩 Screw/Torque(Max)[N.m]    | -            |
| 工作温度 Operating temperature [°C] | -40°C~+130°C |
| 焊锡温度 Soldering temperature      | 285°C/10S    |
| 引针尺寸 Pin dimensions [mm]        | 0.64*0.64    |
| PCB板孔径 PCB Hole Diameter [mm]   | Ø1.2         |

尺寸图

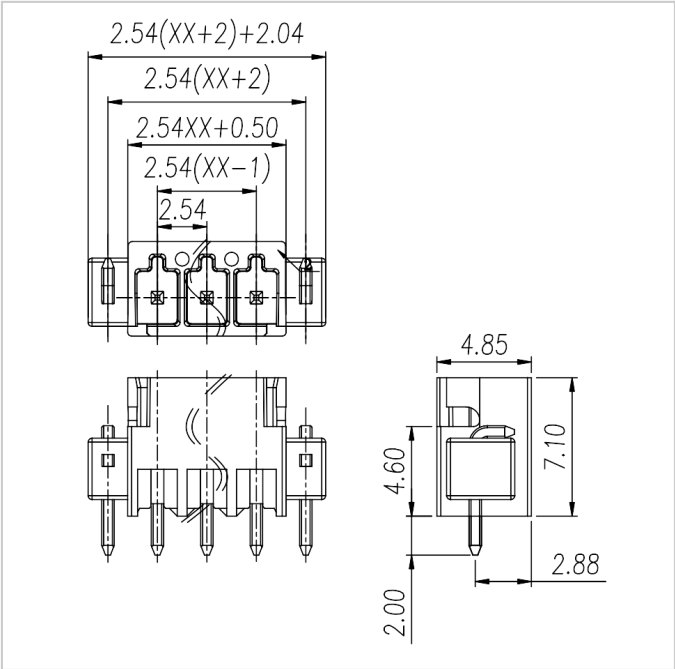

PCB开孔图

