


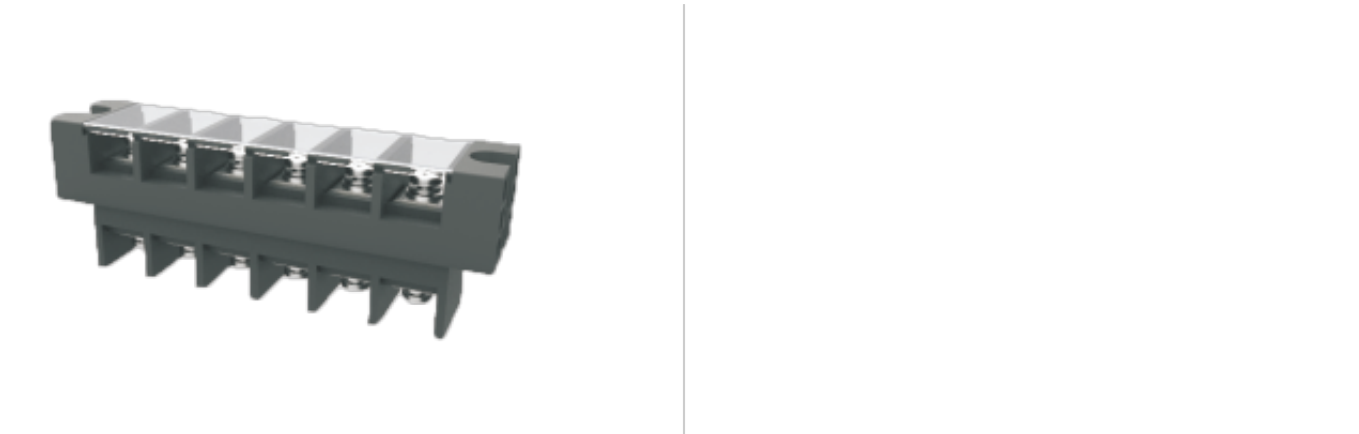

 目录仅供参考，实际规格依产品工程图为准 版本1.0

材质及电镀 Material

螺丝 Screws	M6.0 Steel Zn plated
焊脚 Pin Header	Copper alloy , Sn plated
塑件 Housing	PBT , UL94V-0

电气性能 Electrical


参考标准 Standard	UL
额定电压 Rated voltage	600V
额定电流 Rated current	115A
使用线径 Wire range	8-2AWG
接触电阻 Contact Resistance	20mΩ
绝缘电阻 Insulation resistance	1000MΩ/DC500V
耐电压 Withstanding voltage	AC2200V/1Min
温度范围 Temp.range	-40℃~+105℃
扭矩 Torque	30.6Kgf.cm/3.0Nm/26.6Lb.in

一般参数 Other Data

间距/极数 Pitch/Poles [mm]/[P]	21.0/1-15
----------------------------	-----------

工作温度 Operating temperature [°C]	-40°C~+130°C
扭矩 Torque	30.6Kgf.cm/3.0Nm/26.6Lb.in

尺寸图

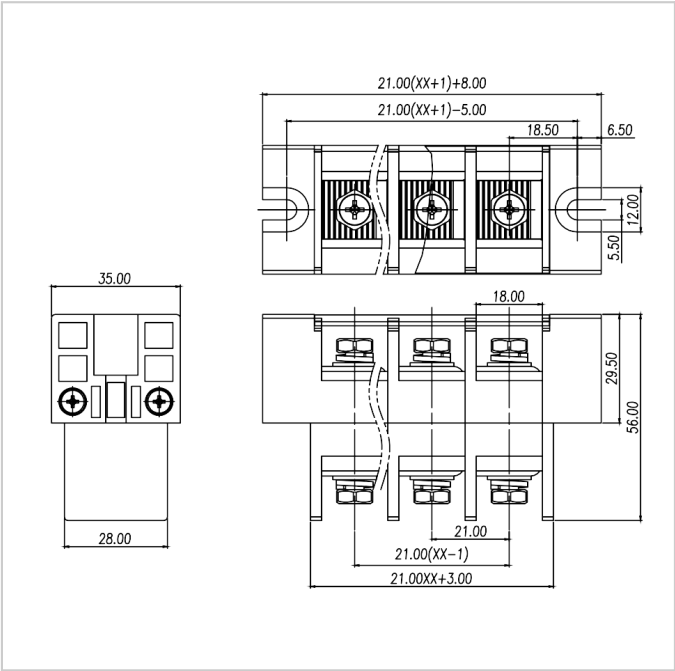

PCB开孔图

