

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术参数-UL ( 1059 )

|                        |          |     |     |
|------------------------|----------|-----|-----|
| 等级 Use Group           | B        | C   | D   |
| 额定电压 Rated Voltage [V] | 300      | 300 | 600 |
| 额定电流 Rated Current [A] | 15       | 15  | 5   |
| 接线范围 Wire Range        | 26-14AWG |     |     |

技术参数-IEC(60947-7-1)

|                                  |      |
|----------------------------------|------|
| 过电压类别 Overvoltage Category       | III  |
| 污染等级 Contamination Class         | 3    |
| 额定电压 Rated Voltage               | 500V |
| 额定电流 Rated Current               | 16A  |
| 额定冲击电压 Impulse withstand voltage | 6KV  |

导线截面积 Conductor cross section

|                                |                        |
|--------------------------------|------------------------|
| 单芯 Solid                       | 0.2-1.5mm <sup>2</sup> |
| 柔性导线 Flexible                  | 0.2-1.5mm <sup>2</sup> |
| 柔性导线带冷压头 Flexible with ferrule | 0.2-1mm <sup>2</sup>   |


材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame retardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |


一般参数 Other Data

|                                    |               |
|------------------------------------|---------------|
| 长/高/厚 Length/Height/Thickness [mm] | 65.6/41.1/3.5 |
| 剥线长度 Stripping Length [mm]         | 8-10          |
| 认证 Approval                        | /             |

尺寸图

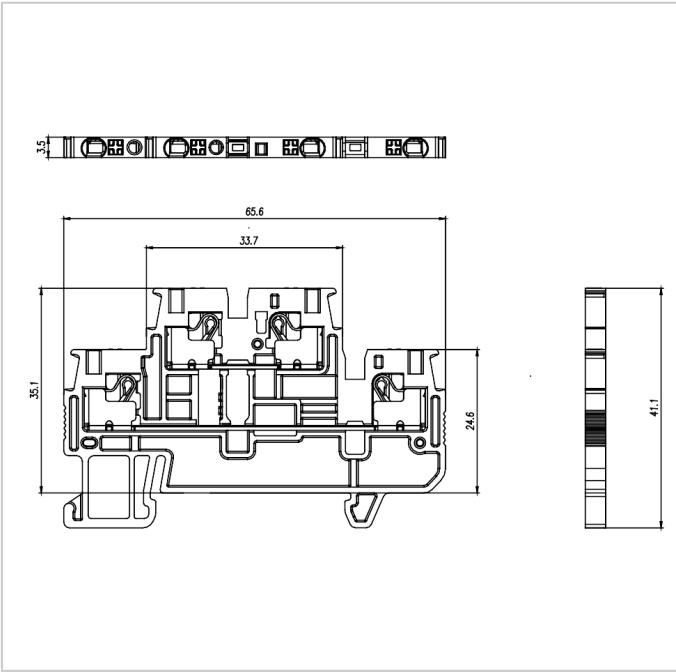


配件




FUVA1.5-XX




DUV1.5-202



PUV1.5-144



EB-35



EW-35



DGS1-35x7.5W4.2x12




DGS1-35x7.5W5.2x15



DGS1-35x7.5W



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D