

Use wire diameter: 26-14AWG

spacing:3.5mm

Install: DGL2-35x7.5

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Wire Range [AWG]	26～14		

IEC (60947-7-2)

Soild [mm²]	0.2-1.5
Flexible [mm²]	0.2-1.5
Flexible with ferrule [mm²]	0.2-1.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	6


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated



Other Date

Length/Height/Thickness [mm]	45.0/30.6/3.5
Stripping Length [mm]	8-10


Dimensions

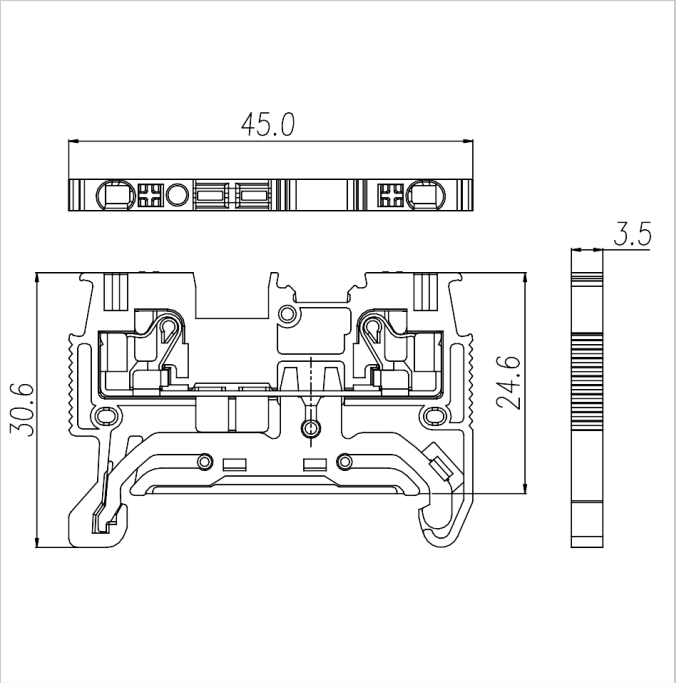


Accessories

DUV1.5-102



FUVA1.5-XX



MUV1.5-10




PUV1.5-144

EB-35

EW-35







DGL2-35x7.5A

DGL2-35x7.5B

DGL2-35x7.5C



DGL2-35x7.5D