


Use wire diameter: 26-14AWG

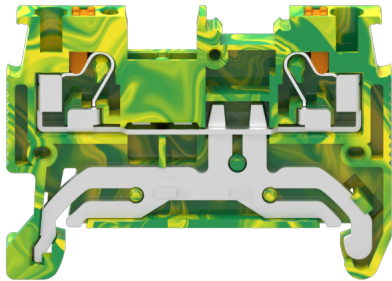

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

| Use Group        | B | C       | D |
|------------------|---|---------|---|
| Wire Range [AWG] |   | 26 ~ 14 |   |


IEC ( 60947-7-2 )

|                                |         |
|--------------------------------|---------|
| Soild [mm²]                    | 0.2-1.5 |
| Flexible [mm²]                 | 0.2-1.5 |
| Flexible with ferrule [mm²]    | 0.2-1.0 |
| Overvoltage Category           | III     |
| Contamination Class            | 3       |
| Impulse withstand voltage [KV] | 6       |


Material

|                              |               |
|------------------------------|---------------|
| Insulation Material          | PA66          |
| Flame retardant rating       | UL94V-0       |
| Conductor Material           | Copper alloy  |
| Plating of conductor surface | Sn plated     |
| Other Data                   |               |
| Length/Height/Thickness [mm] | 45.0/30.6/3.5 |
| Stripping Length [mm]        | 8-10          |

Dimensions

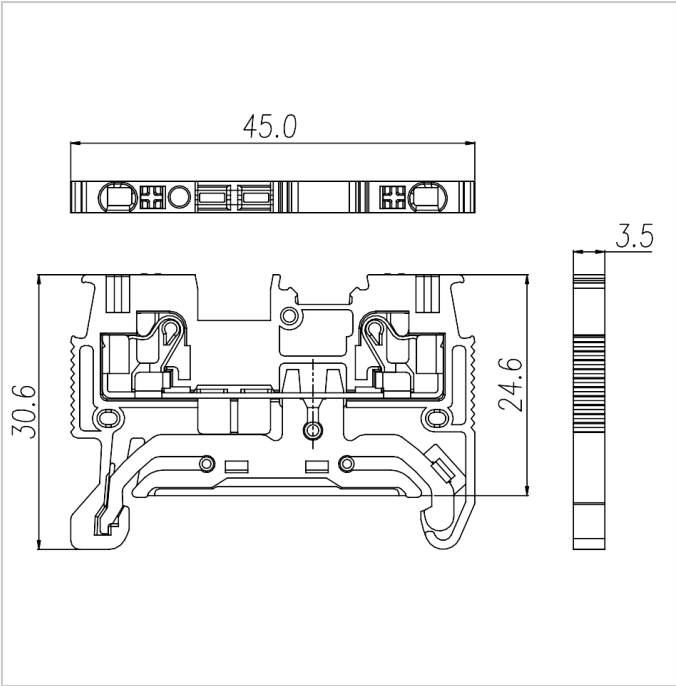


Accessories



DUV1.5-102



FUVA1.5-XX




MUV1.5-10




PUV1.5-144



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C

DGL2-35x7.5D