

Use wire diameter: 26-12AWG



The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Wire Range [AWG]		26 ~ 12	

IEC (60947-7-2)

Soild [mm²]	0.2-4.0
Flexible [mm²]	0.2-2.5
Flexible with ferrule [mm²]	0.2-2.5
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated


Other Data

Length/Height/Thickness [mm]	60.6/35.3/5.2
Stripping Length [mm]	8-10

Dimensions

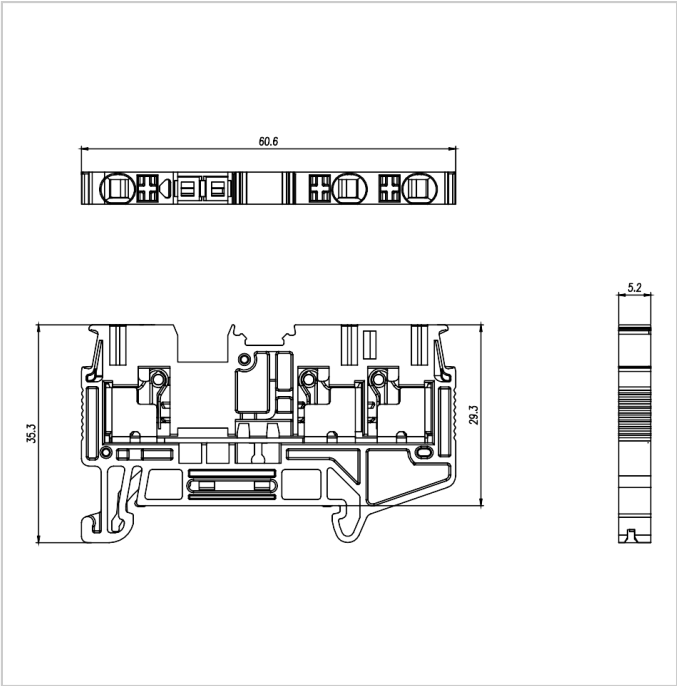


Accessories



FUVA2.5-XX



DUV2.5-103




MUV2.5-10




PUV2.5-96



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C

DGL2-35x7.5D