


Use wire diameter: 24-6AWG

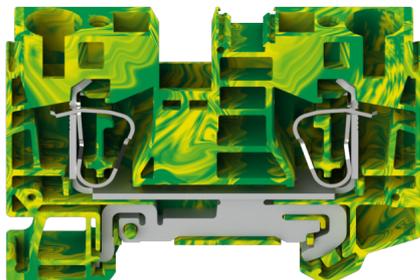

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

Wire Range [AWG]	24~6
------------------	------

IEC ( 60947-7-2 )

Soild [mm <sup>2</sup> ]	0.2-16.0
Flexible [mm <sup>2</sup> ]	0.2-10.0
Flexible with ferrule [mm <sup>2</sup> ]	0.25-10.0
Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8

Material


Insulation Material	PA66
---------------------	------

Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

### Other Date

Length/Height/Thickness [mm]	71.5/49.5/10.2
Stripping Length [mm]	18

### Dimensions

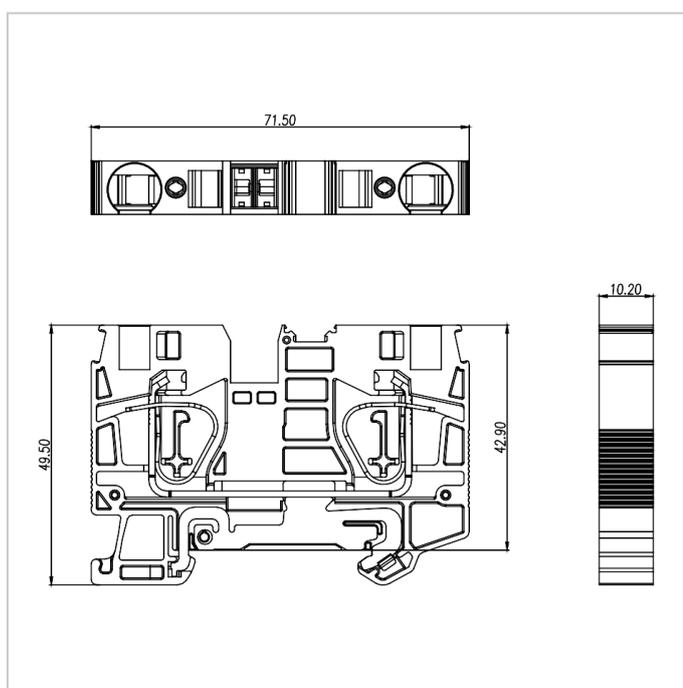

### Accessories



FUVA10-XX



DUS10-102



MUV10-10



PUV10-48



EB-35



EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D