
GUK10N-102

GUK Copper Alloy Cage Locking TB

Download Date:2026-11-02

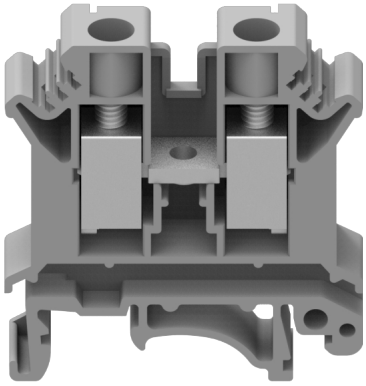

Rated current: 65A

Rated voltage: 600V

Use wire diameter: 20-6AWG

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL (1059)

Use Group	B	C	D
Rate Voltage [V]	600	600	600
Rated Current [A]	65	65	5
Wire Range [AWG]		20-6	

IEC (60947-7-1)

Rated Voltage [V]	800
Rated Current [A]	57
Soild [mm²]	0.5-16.0
Flexible [mm²]	0.5-10.0
Flexible with ferrule [mm²]	0.5-6.0

Overvoltage Category	III
Contamination Class	3
Impulse withstand voltage [KV]	8


Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated

Other Date

Length/Height/Thickness [mm]	42.5/45.8/10.2
Stripping Length [mm]	10-11
Screw/Torque [N.m]	M4/1.5-1.8


Dimensions

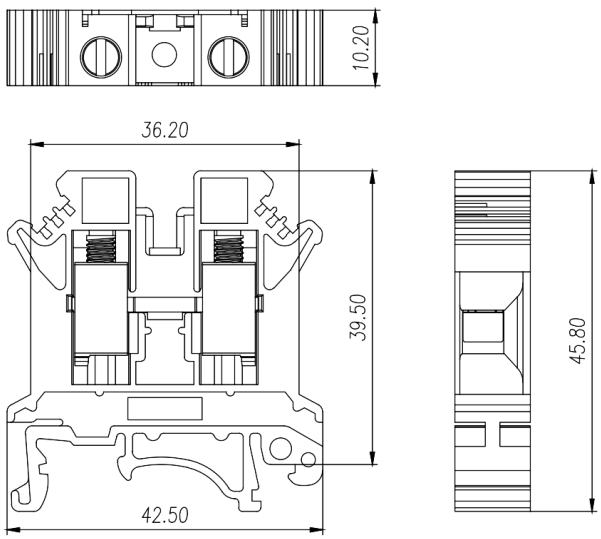


Accessories



D-GUK3/10-102



MUV10-10



EB-35




EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D