




Rated current: 15A  
Rated voltage: 300V  
Use wire diameter: 28-14AWG

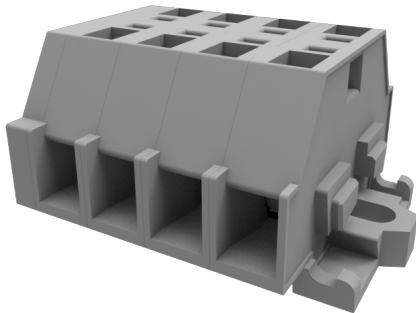

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL ( 1059 )

| Use Group         | B       | C   | D   |
|-------------------|---------|-----|-----|
| Rate Voltage [V]  | 300     | 300 | 600 |
| Rated Current [A] | 15      | 15  | 5   |
| Wire Range [AWG]  | 28 ~ 14 |     |     |

IEC

|                      |         |
|----------------------|---------|
| Rated Voltage [V]    | 500     |
| Rated Current [A]    | 24      |
| Soild [mm²]          | 0.2-2.5 |
| Flexible [mm²]       | 0.2-2.5 |
| Overvoltage Category | III     |

|                                |   |
|--------------------------------|---|
| Contamination Class            | 3 |
| Impulse withstand voltage [KV] | 6 |

Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                       |     |
|-----------------------|-----|
| Stripping Length [mm] | 8-9 |
|-----------------------|-----|

Dimensions

