




Rated current: 5A  
Rated voltage: 150V  
Use wire diameter: 30-20AWG  
spacing:2.54mm  
Install:

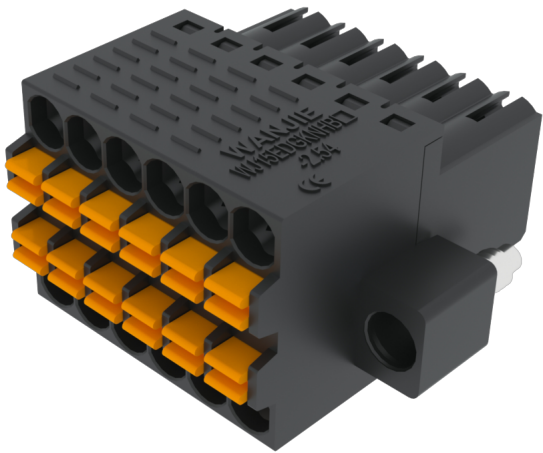

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group                    | B     | C | D |
|------------------------------|-------|---|---|
| Rate Voltage [V]             | 150   | - | - |
| Rated Current [A]            | 5     | - | - |
| Wire Range [AWG]             | 30-20 |   |   |
| Dielectric Voltage-Withstand | 1.3KV |   |   |

IEC

| Overvoltage Category | III | III | II  |
|----------------------|-----|-----|-----|
| Contamination Class  | 3   | 2   | 2   |
| Rated Voltage [V]    | 160 | 160 | 320 |
| Rated Current [A]    | 6   | 6   | 6   |

|                                |         |     |     |
|--------------------------------|---------|-----|-----|
| Impulse withstand voltage [KV] | 2.5     | 2.5 | 2.5 |
| Conductor cross section [mm²]  | 0.2-0.5 |     |     |


Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                            |               |
|----------------------------|---------------|
| Pitch/Poles [mm]/[P]       | 2.54/2*2-2*24 |
| Stripping Length [mm]      | 7-8           |
| Screw/Torque(Max)[N.m]     | -             |
| Operating temperature [°C] | -40 ~ +105    |

Dimensions

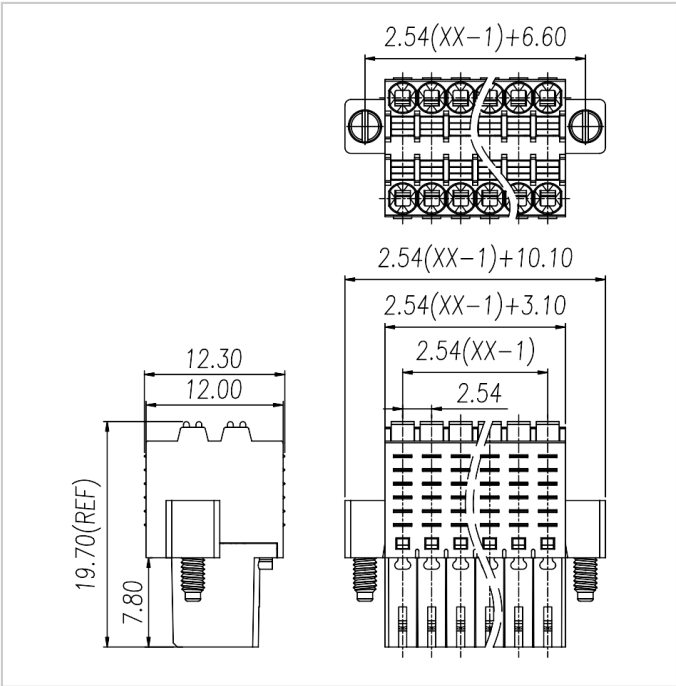

## Accessories



WJ15EDGVHSM-THR-2.54



WJ15EDGRHSM-THR-2.54