




Rated current: 10A  
Rated voltage: 300V  
Use wire diameter: 28-16AWG  
spacing:3.81mm  
Install:

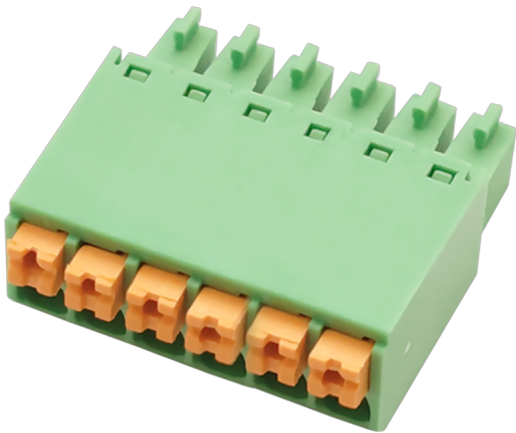

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

| Use Group                    | B     | C | D   |
|------------------------------|-------|---|-----|
| Rate Voltage [V]             | 300   | - | 300 |
| Rated Current [A]            | 10    | - | 10  |
| Wire Range [AWG]             | 28-16 |   |     |
| Dielectric Voltage-Withstand | 1.6KV |   |     |

IEC

| Overvoltage Category | III | III | II  |
|----------------------|-----|-----|-----|
| Contamination Class  | 3   | 2   | 2   |
| Rated Voltage [V]    | 160 | 160 | 320 |
| Rated Current [A]    | 10  | 10  | 10  |

|                                |         |     |     |
|--------------------------------|---------|-----|-----|
| Impulse withstand voltage [KV] | 2.5     | 2.5 | 2.5 |
| Conductor cross section [mm²]  | 0.2-1.5 |     |     |


Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame relardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

Other Date

|                            |            |
|----------------------------|------------|
| Pitch/Poles [mm]/[P]       | 3.81/2-24  |
| Stripping Length [mm]      | 9-10       |
| Screw/Torque(Max)[N.m]     | -          |
| Operating temperature [°C] | -40 ~ +105 |

Dimensions

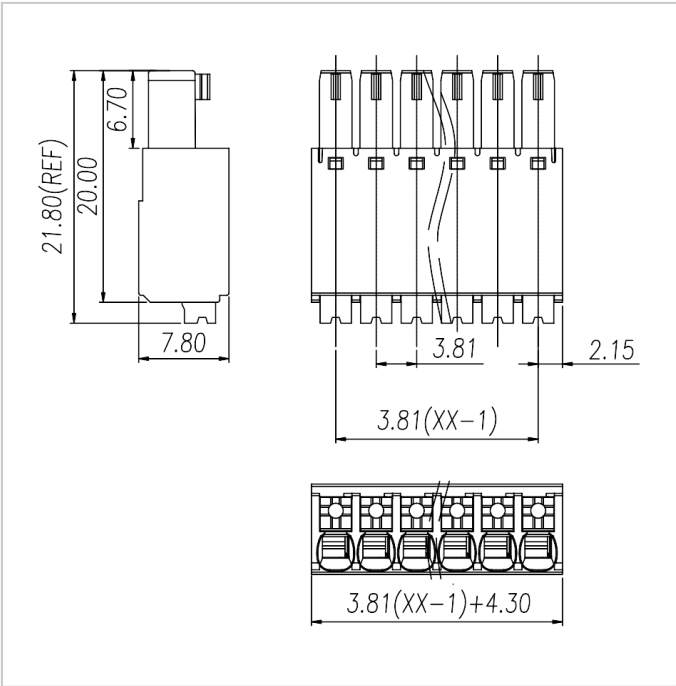


## Accessories



WJ15EDGVC-THR-3.81




WJ15EDGRC-THR-3.81



WJ15EDGVHB-THT-3.81




WJ15EDGRHB-THT-3.81



WJ15EDGKR-3.81



WJ15EDGVC-3.81



WJ15EDGRC-3.81



WJ15EDGLC-3.81