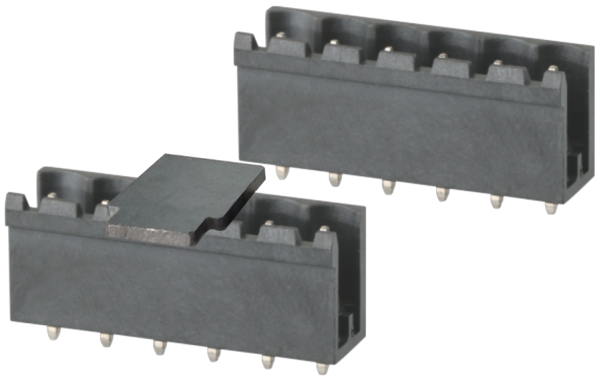


Rated current: 15A

Rated voltage: 300V

spacing:5.08mm

Install: Reflow Soldering

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL/CUL

| Use Group | B | C | D |
|---|---|---|---|
| Rate Voltage [V] | 300 | - | 300 |
| Rated Current [A] | 15 | - | 10 |
| Wire Range [AWG] | | - | |
| Dielectric Voltage-Withstand | | 1.6KV | |

## IEC

| Overvoltage Category | III | III | II |
|---|---|---|---|
| Contamination Class | 3 | 2 | 2 |
| Rated Voltage [V] | 250 | 320 | 400 |
| Rated Current [A] | 18 | 18 | 18 |

| | | | |
|---|---|---|---|
| Impulse withstand voltage [KV] | 4 | 4 | 4 |
| Conductor cross section [mm²] | | - | |

## Material


| | |
|---|---|
| Insulation Material | LCP |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |


## Other Date

| | |
|---|---|
| Pitch/Poles [mm]/[P] | 5.08/2-24 |
| Stripping Length [mm] | - |
| Screw/Torque(Max)[N.m] | - |
| Operating temperature [℃] | -40～+130 |
| Soldering method | Reflow Soldering |
| Pin dimensions [mm] | 1.0*1.0 |
| PCB Hole Diameter [mm] | Ø1.7 |

## Dimensions

## PCB hole diagram

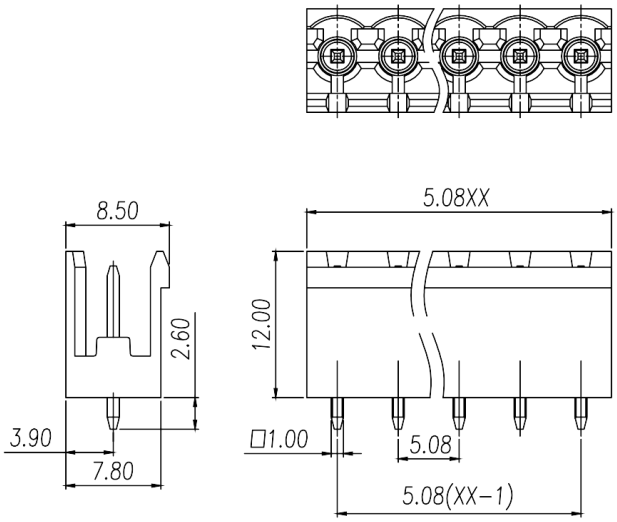


## Accessories



WJ2EDGK-5.08



WJ2EDGKH-5.08



WJ2EDGKA-5.08



WJ2EDGKB-5.08



WJ2EDGKAH-5.08



WJ2EDGKC-5.08







WJ2EDGKD-5.08




WJ2EDGKDA-5.08



WJ2EDGKDB-5.08



WJ2EDGKDH-5.08



WJ2EDGKZ-5.08



WJ2EDGKL-5.08

WJ2EDGB-5.08



WJ2EDGA-5.08