


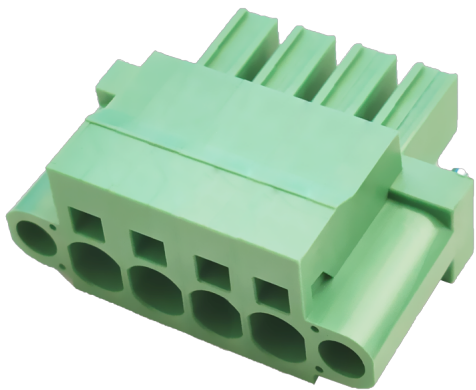

Rated current: 35A
Rated voltage: 600V
Use wire diameter: 24-8AWG
spacing:7.62mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	600	600	-
Rated Current [A]	35	35	-
Wire Range [AWG]	24-8		
Dielectric Voltage-Withstand	2.2KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	1000	1000	1000
Rated Current [A]	41	41	41

Impulse withstand voltage [KV]	8	8	6
Conductor cross section [mm²]	0.2-6.0		


Material

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

Other Data

Pitch/Poles [mm]/[P]	7.62/2-12
Stripping Length [mm]	14-15
Screw/Torque(Max)[N.m]	-
Operating temperature [°C]	-40 ~ +105

Dimensions

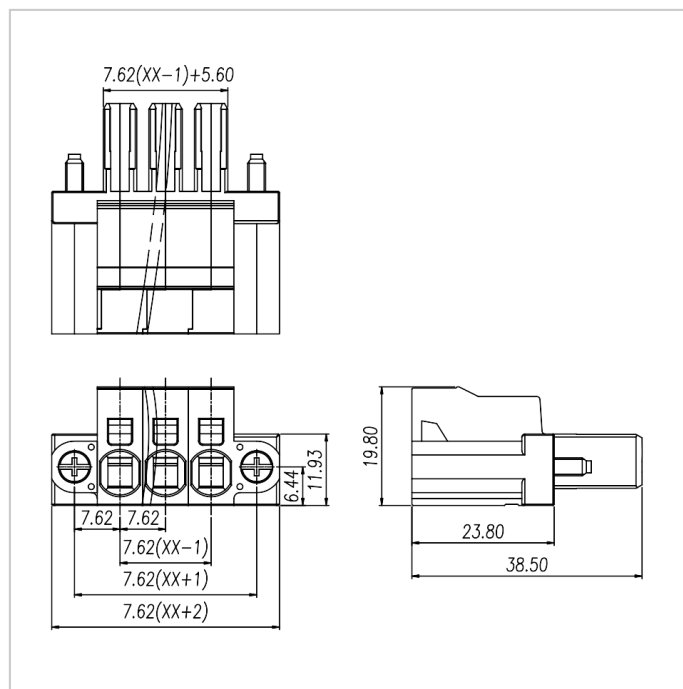

Accessories



WJ3EDGKRN-7.62



WJ3EDGKRP-7.62



WJ3EDGVM-7.62



WJ3EDGVZM-7.62



WJ3EDGRM-7.62



WJ3EDGRZM-7.62



WJ3EDGVHM-7.62



WJ3EDGRHM-7.62



WJ3EDGRRHM-7.62