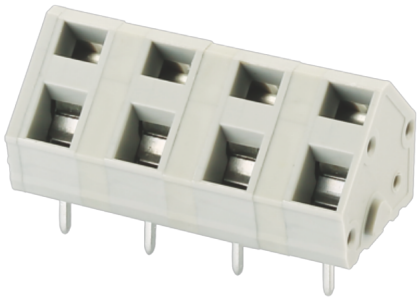


Rated current: 15A

Rated voltage: 300V

Use wire diameter: 28-12AWG

spacing:7.62mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	15	-	10
Wire Range [AWG]	28-12		
Dielectric Voltage-Withstand	1.6KV		

IEC

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	400	630	1000
Rated Current [A]	24	24	24

Impulse withstand voltage [KV]	6	6	6
导Conductor cross section [mm²]	0.2-2.5		

Material

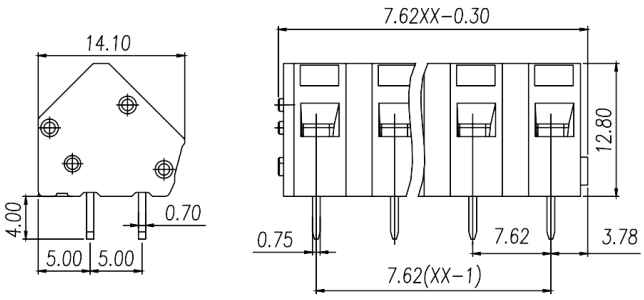
Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

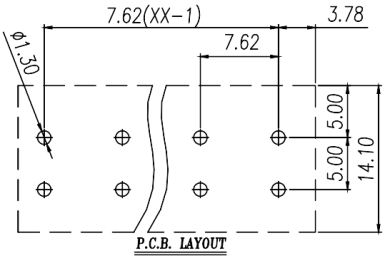
Other Date

Pitch/Poles [mm]/[P]	7.62/2-30
Stripping Length [mm]	5-6
Screw/Torque(Max)[N.m]	-
Operating temperature [℃]	-40～+105
Soldering method	Wave soldering
Pin dimensions [mm]	0.75*0.7
PCB Hole Diameter [mm]	Ø1.3

Dimensions

PCB hole diagram


14.10
4.00
0.70
5.00
5.00
7.62XX−0.30
12.80
0.75
7.62
3.78
7.62(XX−1)


7.62(XX−1)
3.78
7.62
ϕ1.30
5.00
5.00
14.10
P.C.B. LAYOUT