


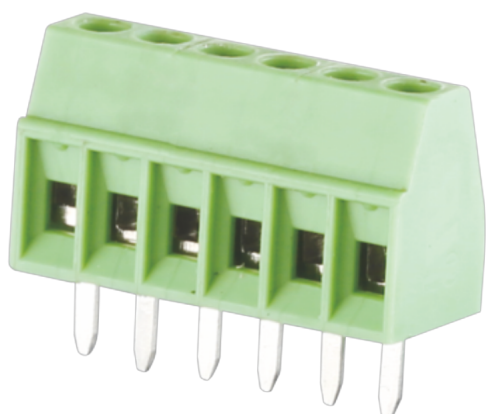

Rated current: 7A

Rated voltage: 150V

Use wire diameter: 26-18AWG

spacing:2.54mm

Install: Wave soldering



The catalog is for reference only. The actual  
specifications are subject to the product  
engineering drawings. version 1.0

## UL/CUL

| Use Group                    | B       | C | D |
|------------------------------|---------|---|---|
| Rate Voltage [V]             | 150     | - | - |
| Rated Current [A]            | 7       | - | - |
| Wire Range [AWG]             | 26 ~ 18 |   |   |
| Dielectric Voltage-Withstand | 1.3KV   |   |   |

## IEC

| Overvoltage Category | III | III | II  |
|----------------------|-----|-----|-----|
| Contamination Class  | 3   | 2   | 2   |
| Rated Voltage [V]    | 63  | 160 | 320 |
| Rated Current [A]    | 8   | 8   | 8   |

|                                            |         |     |     |
|--------------------------------------------|---------|-----|-----|
| Impulse withstand voltage [KV]             | 1.5     | 2.5 | 2.5 |
| Conductor cross section [mm <sup>2</sup> ] | 0.2~1.0 |     |     |

## Material

|                              |              |
|------------------------------|--------------|
| Insulation Material          | PA66         |
| Flame retardant rating       | UL94V-0      |
| Conductor Material           | Copper alloy |
| Plating of conductor surface | Sn plated    |

## Other Data

|                            |                |
|----------------------------|----------------|
| Pitch/Poles [mm]/[P]       | 2.54/2-24      |
| Stripping Length [mm]      | 4-5            |
| Screw/Torque(Max)[N.m]     | M1.6/0.1       |
| Operating temperature [°C] | -40 ~ +105     |
| Soldering method           | Wave soldering |
| Pin dimensions [mm]        | 0.5*0.8        |
| PCB Hole Diameter [mm]     | Ø1.0           |

## Dimensions

## PCB hole diagram

