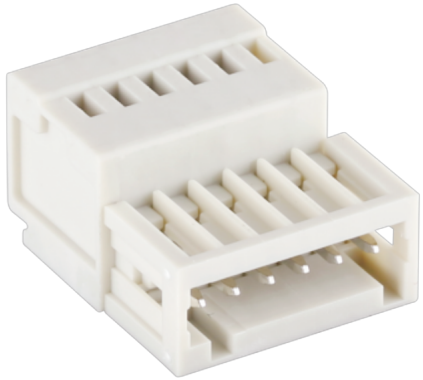


Rated current: 4A

Rated voltage: 150V

Use wire diameter: 28-20AWG

spacing:2.5mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

## UL/CUL

| | | | |
|---|---|---|---|
| Use Group | B | C | D |
| Rate Voltage [V] | 150 | - | 150 |
| Rated Current [A] | 4 | - | 4 |
| Wire Range [AWG] | 28-20 | | |
| Dielectric Voltage-Withstand | 1.3KV | | |

## IEC

| | | | |
|---|---|---|---|
| Overvoltage Category | III | III | II |
| Contamination Class | 3 | 2 | 2 |
| Rated Voltage [V] | 100 | 160 | 320 |
| Rated Current [A] | 6 | 6 | 6 |

| | | | |
|---|---|---|---|
| Impulse withstand voltage [KV] | 2.5 | 2.5 | 2.5 |
| Conductor cross section [mm²] | 0.25-0.5 | | |


## Material

| | |
|---|---|
| Insulation Material | PA66 |
| Flame relardant rating | UL94V-0 |
| Conductor Material | Copper alloy |
| Plating of conductor surface | Sn plated |

## Other Date

| | |
|---|---|
| Pitch/Poles [mm]/[P] | 2.5/2-12 |
| Stripping Length [mm] | 5-6 |
| Screw/Torque(Max)[N.m] | - |
| Operating temperature [℃] | -40～+105 |

## Dimensions

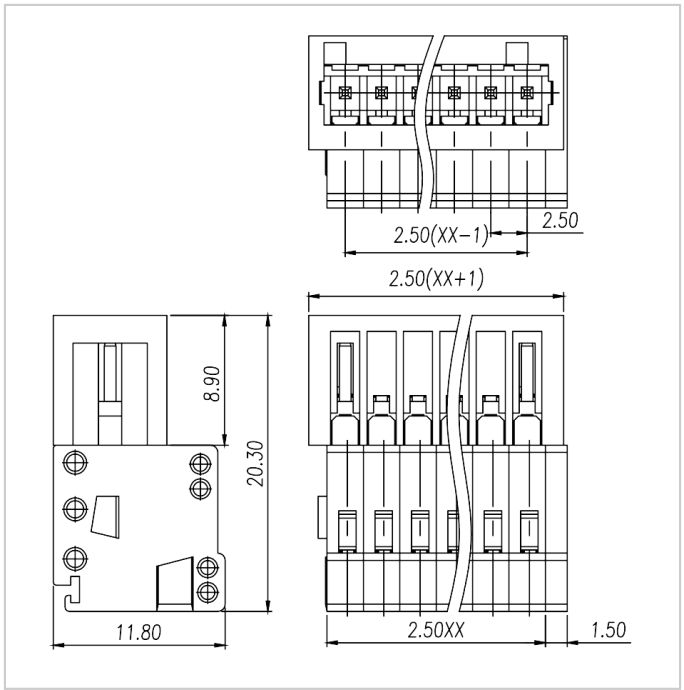

## Accessories



WJ0101-01XX



WJ0101-02XX