
MY8HS-1.2

FEED THROUGH TERMINAL BLOCK

Download Date:2026-11-02

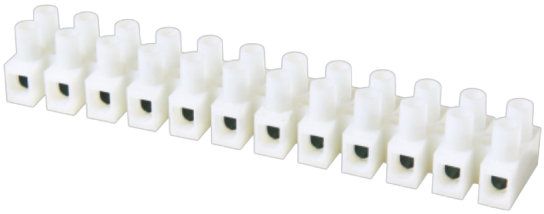

Rated current: 20A

Rated voltage: 600V

Use wire diameter: 20-12AWG

spacing:8.2mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Material

Housing	PA66, UL94V-2
Screws	M2.5, Steel, Zn plated
Pressure line column	SPCC, Zn plated

Electrical

Standard	UL	IEC
Rated Voltage [V]	600	450
Rated Current [A]	20	32
Wire range	20-12AWG	4.0mm²
Contact Resistance	20mΩ	
Insulation Resistance	500MΩ/DC500V	

Withsranding voltage	AC2200/1Min
Temp.range	-40℃~+105℃
Torque	0.4N.m(3.6Lb.in)

Dimensions

