
MY510

FEED THROUGH TERMINAL BLOCK

Download Date:2026-11-03

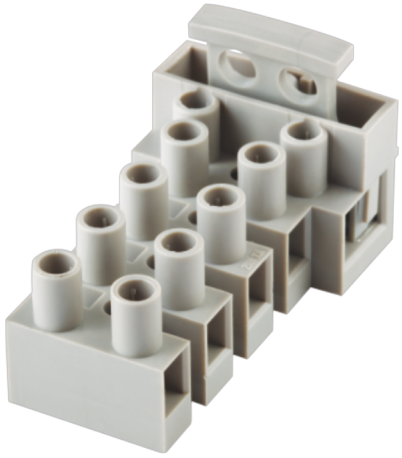

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 22-14AWG

spacing:10.0mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

UL/CUL

Use Group	B	C	D
Rate Voltage [V]	300	300	300
Rated Current [A]	15	15	10
Wire Range [AWG]		22-14	
Dielectric Voltage-Withstand		1.6KV	

IEC

Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
Contamination Class	3	2	2
Rated Voltage [V]	-	250	-
Rated Current [A]	-	6.3	-

Impulse withstand voltage [KV]	-	2	-
Conductor cross section [mm²]		0.2-2.5	

Material

Insulation Material	PA66
Flame relardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Ni plated

Other Date

Pitch/Poles [mm]/[P]	10.0/2-5
Stripping Length [mm]	7-8
Screw/Torque(Max)[N.m]	M3/0.5
Operating temperature [℃]	-40～+105

Dimensions

