
WJ25H

BARRIER TERMINAL BLOCK

Download Date:2026-11-02

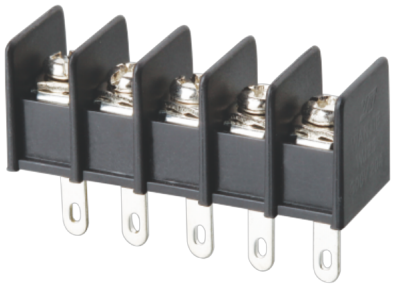

Rated current: 15A

Rated voltage: 300V

Use wire diameter: 22-14AWG

spacing:7.62mm

The catalog is for reference only. The actual specifications are subject to the product engineering drawings. version 1.0

Material

Screws	M3.0 Steel Ni plated
Pin Header	Copper alloy , Sn plated
Housing	PA66 , UL94V-0

Electrical


Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Wire range	22-14AWG	1.5mm²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	

Withstanding voltage	AC2000V/1Min

Other Date

Pitch/Poles [mm]/[P]	7.62/2-26
Operating temperature [℃]	-40～+105
Torque	5.10kgf-cm/0.5N.m/4.43Lbin

Dimensions

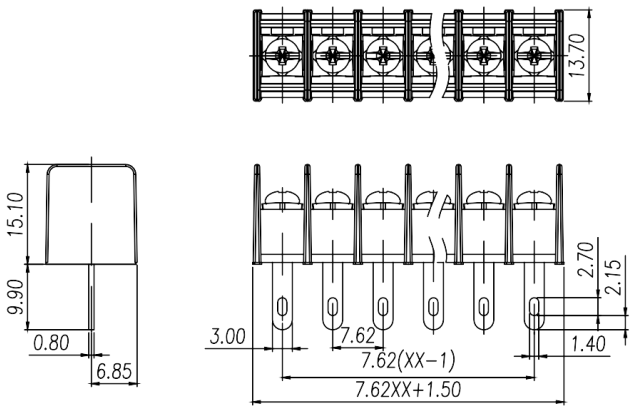

PCB hole diagram

