


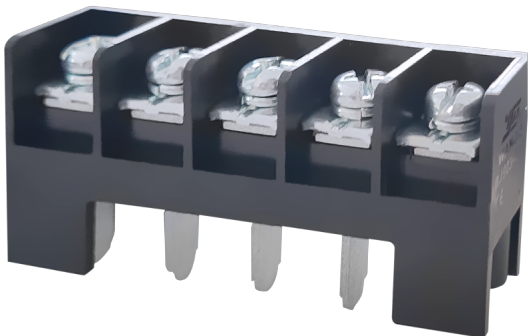

额定电流: 20A
额定电压: 300V
使用线径: 26-12AWG
间距:13.5mm

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	300	300	300
额定电流 Rated Current [A]	20	20	10
接线范围 Wire Range [AWG]	26-12		
耐电压 Dielectric Voltage-Withstand	1.6KV		

材料 Material

绝缘材料 Insulation Material	PBT
阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated

一般参数 Other Date

间距/极数 Pitch/Poles [mm]/[P]	13.5/3-14
剥线长度 Stripping Length [mm]	10-13
螺丝/扭矩 Screw/Torque(Max)[N.m]	M5/2.0
工作温度 Operating temperature [°C]	-30 ~ +120
焊接方式 Soldering method	Wave soldering
引针尺寸 Pin dimensions [mm]	1.2*5.8
PCB板孔径 PCB Hole Diameter [mm]	2.0*6.6

尺寸图

PCB开孔图

