

额定电流: 40A  
额定电压: 600V  
使用线径: 20-8AWG



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL ( 1059 )

| 等级 Use Group           | B      | C   | D   |
|------------------------|--------|-----|-----|
| 额定电压 Rate Voltage [V]  | 600    | 600 | 600 |
| 额定电流 Rated Current [A] | 40     | 40  | 5   |
| 接线范围 Wire Range [AWG]  | 20 ~ 8 |     |     |

技术参数-IEC ( 60947-7-1 )

|                                      |          |
|--------------------------------------|----------|
| 额定电压 Rated Voltage [V]               | 1000     |
| 额定电流 Rated Current [A]               | 41       |
| 单芯 Soild [mm²]                       | 0.5-10.0 |
| 柔性导线 Flexible [mm²]                  | 0.5-6.0  |
| 柔性导线带冷压头 Flexible with ferrule [mm²] | 0.5-6.0  |
| 过电压类别 Overvoltage Category           | III      |

|                                       |   |
|---------------------------------------|---|
| 污染等级 Contamination Class              | 3 |
| 额定冲击电压 Impulse withstand voltage [KV] | 8 |


材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Date

|                                    |               |
|------------------------------------|---------------|
| 长/高/厚 Length/Height/Thickness [mm] | 57.8/42.3/8.2 |
| 剥线长度 Stripping Length [mm]         | 10-12         |

尺寸图

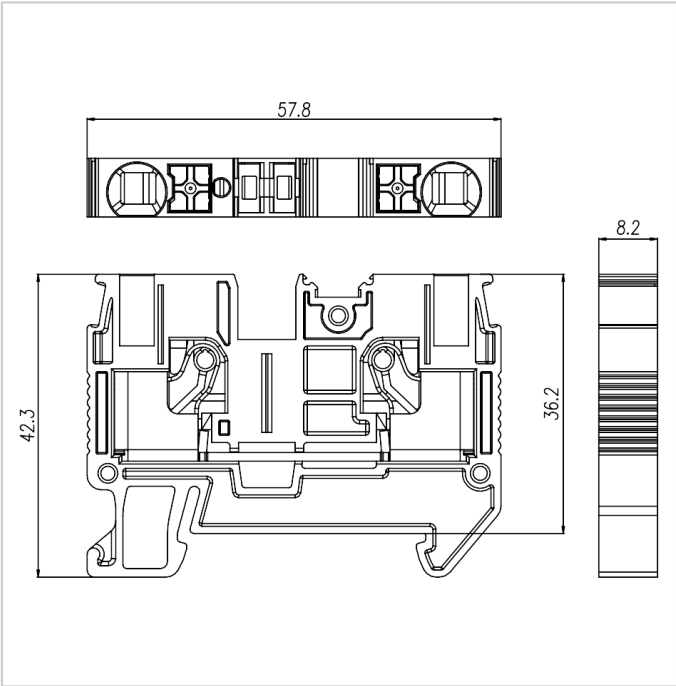

适配产品




DUV6-102




FUVA6-XX




MUV6-10



PUV6-56




EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D