

额定电流: 20A  
额定电压: 600V  
使用线径: 26-12AWG



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL ( 1059 )

| 等级 Use Group           | B       | C   | D   |
|------------------------|---------|-----|-----|
| 额定电压 Rate Voltage [V]  | 600     | 600 | 600 |
| 额定电流 Rated Current [A] | 20      | 20  | 5   |
| 接线范围 Wire Range [AWG]  | 26 ~ 12 |     |     |

技术参数-IEC ( 60947-7-1 )

|                                      |         |
|--------------------------------------|---------|
| 额定电压 Rated Voltage [V]               | 800     |
| 额定电流 Rated Current [A]               | 24      |
| 单芯 Solid [mm²]                       | 0.2-4.0 |
| 柔性导线 Flexible [mm²]                  | 0.2-2.5 |
| 柔性导线带冷压头 Flexible with ferrule [mm²] | 0.2-2.5 |
| 过电压类别 Overvoltage Category           | III     |

|                                       |   |
|---------------------------------------|---|
| 污染等级 Contamination Class              | 3 |
| 额定冲击电压 Impulse withstand voltage [KV] | 8 |


材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |


一般参数 Other Date

|                                    |               |
|------------------------------------|---------------|
| 长/高/厚 Length/Height/Thickness [mm] | 60.6/35.3/5.2 |
| 剥线长度 Stripping Length [mm]         | 8-10          |

尺寸图

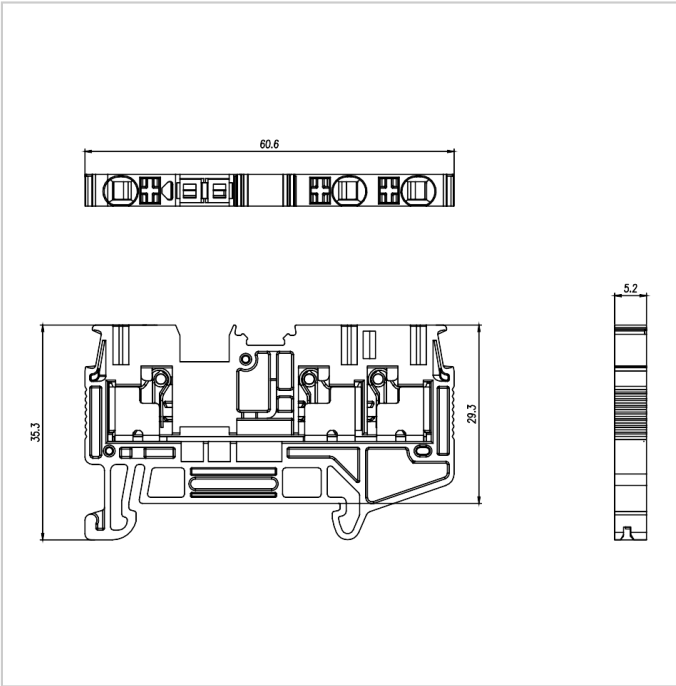

适配产品



FUVA2.5-XX




DUV2.5-103




MUV2.5-10



PUV2.5-96




EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D