


使用线径: 20-8AWG

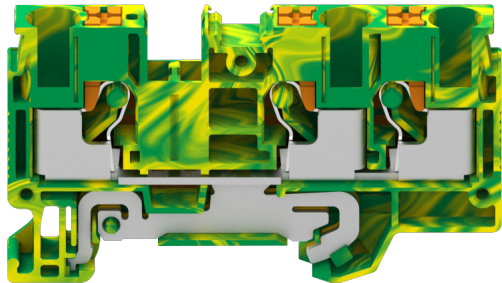

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL ( 1059 )

| 等级 Use Group          | B | C    | D |
|-----------------------|---|------|---|
| 接线范围 Wire Range [AWG] |   | 20~8 |   |

技术参数-IEC ( 60947-7-1 )


|                                       |          |
|---------------------------------------|----------|
| 单芯 Soild [mm²]                        | 0.5-10.0 |
| 柔性导线 Flexible [mm²]                   | 0.5-6.0  |
| 柔性导线带冷压头 Flexible with ferrule [mm²]  | 0.5-6.0  |
| 过电压类别 Overvoltage Category            | III      |
| 污染等级 Contamination Class              | 3        |
| 额定冲击电压 Impulse withstand voltage [KV] | 8        |

材料 Material

|                          |      |
|--------------------------|------|
| 绝缘材料 Insulation Material | PA66 |
|--------------------------|------|

|                                     |               |
|-------------------------------------|---------------|
| 阻燃等级 Flame relardant rating         | UL94V-0       |
| 导体材料 Conductor Material             | Copper alloy  |
| 导体表面镀层 Plating of conductor surface | Sn plated     |
| 一般参数 Other Date                     |               |
| 长/高/厚 Length/Height/Thickness [mm]  | 74.2/42.3/8.2 |
| 剥线长度 Stripping Length [mm]          | 10-12         |

尺寸图

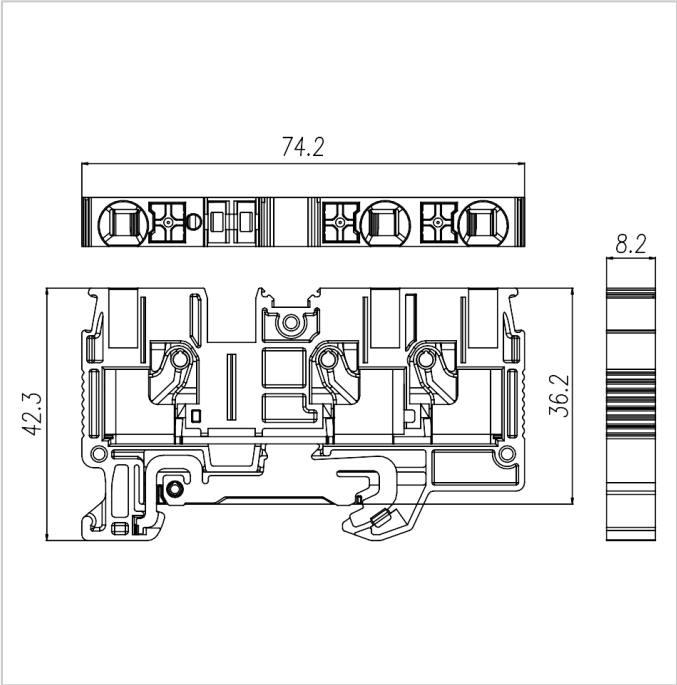


适配产品



FUVA6-XX




DUV6-103




MUV6-10



PUV6-56



EB-35




EW-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D