




额定电流: 10A  
额定电压: 300V  
使用线径: 28-16AWG

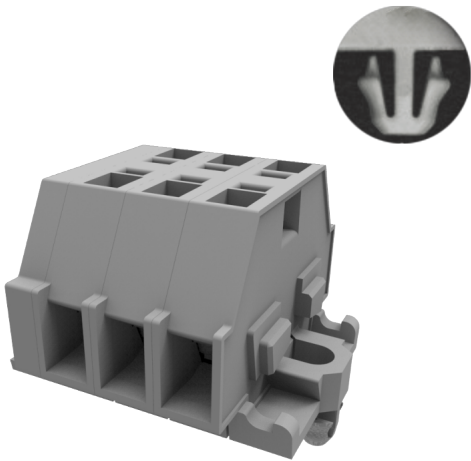

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL ( 1059 )

| 等级 Use Group           | B       | C   | D   |
|------------------------|---------|-----|-----|
| 额定电压 Rate Voltage [V]  | 300     | 300 | 600 |
| 额定电流 Rated Current [A] | 10      | 10  | 5   |
| 接线范围 Wire Range [AWG]  | 28 ~ 16 |     |     |

技术参数-IEC

|                            |         |
|----------------------------|---------|
| 额定电压 Rated Voltage [V]     | 400     |
| 额定电流 Rated Current [A]     | 18      |
| 单芯 Soild [mm²]             | 0.2-1.5 |
| 柔性导线 Flexible [mm²]        | 0.2-1.5 |
| 过电压类别 Overvoltage Category | III     |
| 污染等级 Contamination Class   | 3       |

|                                       |   |
|---------------------------------------|---|
| 额定冲击电压 Impulse withstand voltage [KV] | 6 |
|---------------------------------------|---|

材料 Material

|                                     |              |
|-------------------------------------|--------------|
| 绝缘材料 Insulation Material            | PA66         |
| 阻燃等级 Flame relardant rating         | UL94V-0      |
| 导体材料 Conductor Material             | Copper alloy |
| 导体表面镀层 Plating of conductor surface | Sn plated    |

一般参数 Other Date

|                            |     |
|----------------------------|-----|
| 剥线长度 Stripping Length [mm] | 8-9 |
|----------------------------|-----|

尺寸图

