

使用线径: 18-2AWG



目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL (1059)

接线范围 Wire Range [AWG]	18-2
-----------------------	------

技术参数-IEC (60947-7-2)


单芯 Soild [mm ²]	10.0-35.0
柔性导线 Flexible [mm ²]	10.0-35.0
柔性导线带冷压头 Flexible with ferrule [mm ²]	10.0-35.0
过电压类别 Overvoltage Category	III
污染等级 Contamination Class	3

材料 Material

绝缘材料 Insulation Material	PA66
阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy

导体表面镀层 Plating of conductor surface	Ni plated
一般参数 Other Date	
长/高/厚 Length/Height/Thickness [mm]	50.0/61.8/15.2
剥线长度 Stripping Length [mm]	16-17
螺丝/扭矩 Screw/Torque [N.m]	M6/3.2-3.7

尺寸图

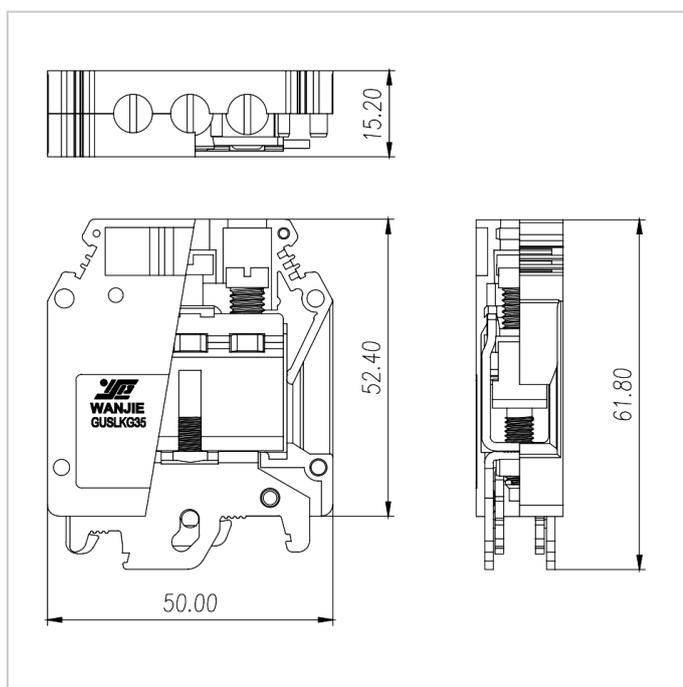

适配产品



MUV10-10



EB-35



EW-35



EC-35



DGL2-35x7.5A



DGL2-35x7.5B



DGL2-35x7.5C



DGL2-35x7.5D