

额定电流: 15A

额定电压: 300V

使用线径: 28-12AWG

间距:5.0mm

目录仅供参考，实际规格依产品工程图为准 版本1.0

技术数据-UL/CUL

等级 Use Group	B	C	D
额定电压 Rate Voltage [V]	300	150	300
额定电流 Rated Current [A]	15	15	10
接线范围 Wire Range [AWG]		28-12	
耐电压 Dielectric Voltage-Withstand		1.6KV	

技术参数-IEC

过电压类别 Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级 Contamination Class	3	2	2
额定电压 Rated Voltage [V]	320	320	630
额定电流 Rated Current [A]	12	12	12
额定冲击电压 Impulse withstand voltage [KV]	4	4	4

导线截面积[硬/柔] Conductor cross section [mm²]	0.25-2.5

材料 Material

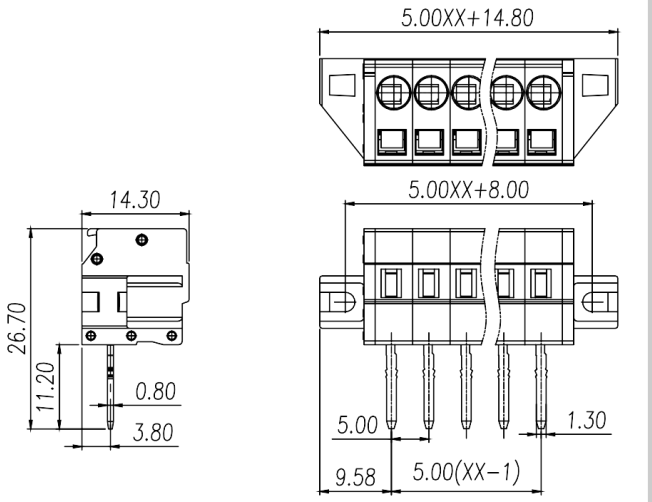
绝缘材料 Insulation Material	PA66
阻燃等级 Flame relardant rating	UL94V-0
导体材料 Conductor Material	Copper alloy
导体表面镀层 Plating of conductor surface	Sn plated


一般参数 Other Date

间距/极数 Pitch/Poles [mm]/[P]	5.0/2-24
剥线长度 Stripping Length [mm]	8-9
螺丝/扭矩 Screw/Torque(Max)[N.m]	-
工作温度 Operating temperature [℃]	-40～+105
焊接方式 Soldering method	Wave soldering
引针尺寸 Pin dimensions [mm]	1.3*0.8
PCB板孔径 PCB Hole Diameter [mm]	Ø1.8

尺寸图

PCB开孔图


5.00XX+14.80
14.30
5.00XX+8.00
26.70
11.20
0.80
3.80
5.00
1.30
9.58
5.00(XX−1)


9.58
5.00(XX−1)
5.00
ø1.80
3.80
P.C.B. LAYOUT