


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除丰给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将负赔偿责任。本公司保留对涉及发明、实用新型和外观专利的所有权利。

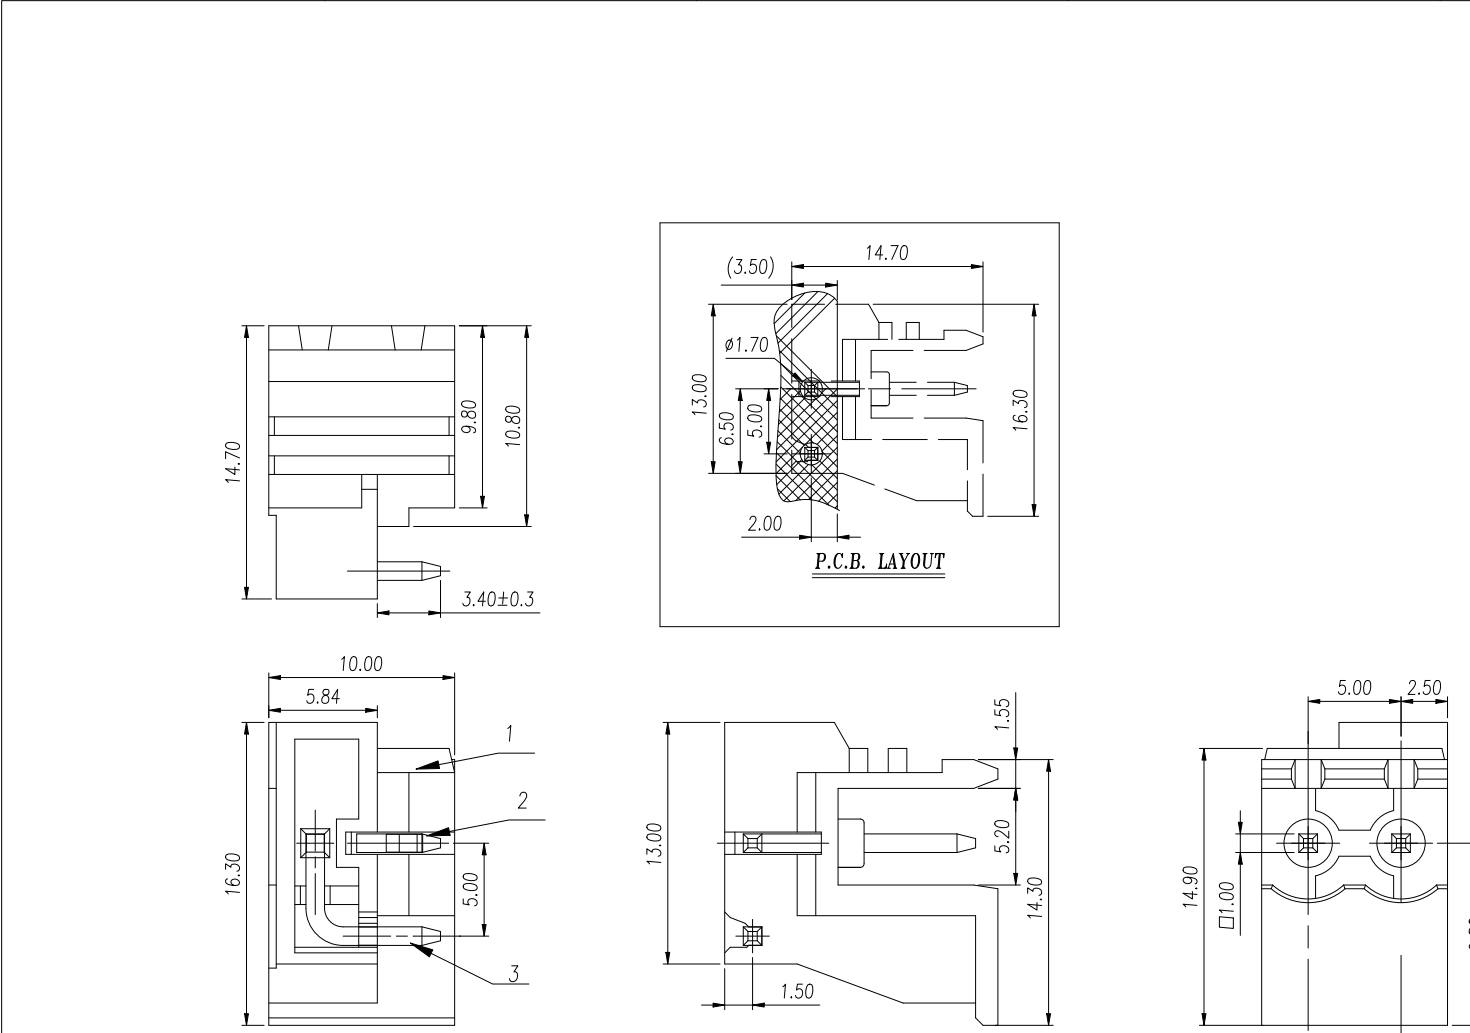

General Tolerances								— ▯ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

3	Pin 2	Copper Alloy	Sn Plated
2	Pin 1	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	CY	DATE	23.10.23	UNITS	mm	THIRD ANGLE PROJECTION	⌀	
CHK.	YangHJ	DATE	23.10.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	23.10.23	SCALE	2.5:1	DRAWING TYPE: SP-03	REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.:	WJ2EDGLF-5.0-02P-1Y-00A	

REVISION RECORD					
REV.	ESCRIPTION		ECN No.	APPROVED	DATE
V0	新发行			CY	23.10.23
UL/CUL 技术参数 UL/CUL Technical Data					
等 级 Use Group			B	C	D
额定电压 Rated Voltage [V]			300	-	300
额定电流 Rated Current [A]			15	-	10
接线范围 Wire Range		-			
单/多芯线 Solid/Stranded [AWG]					
耐电压 Withstanding Voltage		1600V/1Min			
IEC 技术参数 IEC Technical Data					
过电压类别 Overvoltage Category			III	III	II
污染等级 Contamination Class			3	2	2
额定电压 Rated Voltage [V]			250	320	400
额定电流 Rated Current [A]			16	16	16
额定冲击电压 Impulse withstand voltage [KV]			4.0	4.0	4.0
导线截面积 Conductor cross section		-			
硬质/柔性导线 Solid/ flexible [mm²]					
一般参数 Other Data					
间距 Pitch /极数 Poles [mm] / [P]		5.0 / 02P			
工作温度 Operating temperature [°C]		-40~105			
焊锡温度 Soldering temperature		260°C/5S			
引针尺寸 Pin Dimensions [mm]		1.0*1.0			
PCB板孔径 PCB Hole Diameter [mm]		Ø1.7			
符合RoHS环保要求					