
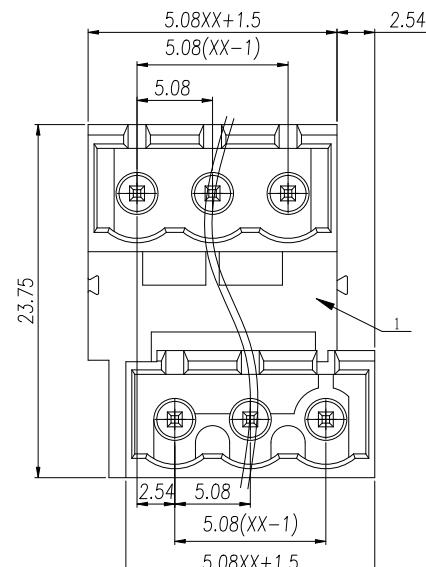
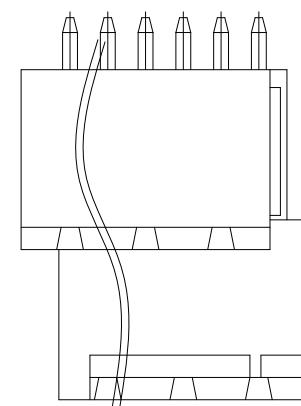


P.C.B. LAYOUT

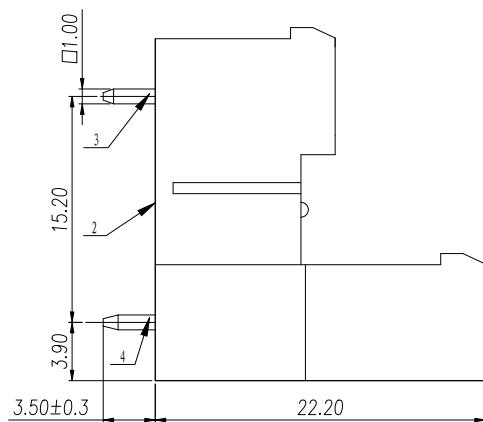

General Tolerances										—		
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	to	over 10	over 100	over 100	to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	24.01.30

UL/CUL 技术参数
UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数
IEC Technical Data

IEC61984

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [kV]	4.0	4.0	4.0
导线截面积	Conductor cross section			
硬质/柔性导线	Solid/ flexible [mm ²]			

一般参数 Other Data

间距 Pitch / 极数 Poles [mm] / [P]	5.08 / 2*2-2*3
工作温度 Operating temperature [°C]	-40~105
焊锡温度 Soldering temperature	260°C/5S
引针尺寸 Pin Dimensions [mm]	1.0*1.0
PCB板孔径 PCB Hole Diameter [mm]	Ø1.7
符合RoHS环保要求	

4	Pin 2	Copper Alloy	Sn Plated	DES.	YaoFei	DATE	24.01.30	UNITS	mm	THIRD ANGLE PROJECTION	⊕
3	Pin 1	Copper Alloy	Sn Plated	CHK.	YangHJ	DATE	24.01.30	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
2	Cover	PA66	UL94V-0	APP.	JASON	DATE	24.01.30	SCALE	2:1	DRAWING TYPE: SP-03	REV 0
1	Housing	PA66	UL94V-0	WANJIE		慈溪市万捷电子有限公司					
	ITEM	NAME OF PART	MATERIAL			CIXI WANJIE ELECTRONIC CO., LTD					

PART NO.:
WJ2EDGVTC-5.08-2*XXP-1Y-00A

A

B

C

D