

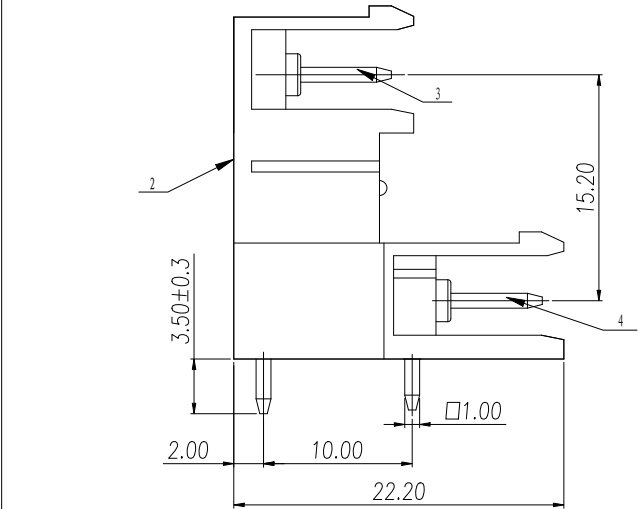
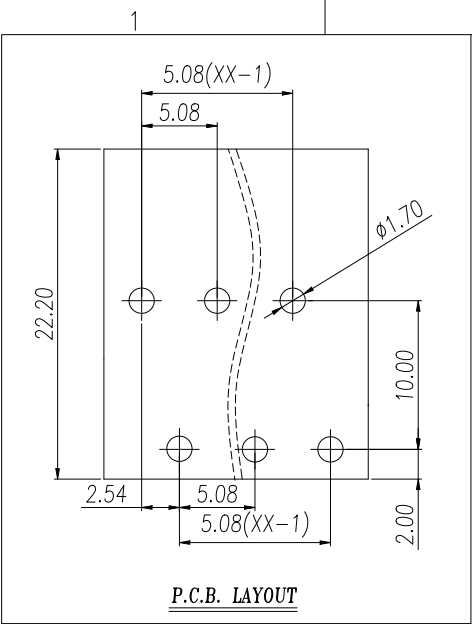


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除丰给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 实用新型专利和外观设计专利的所有权利。

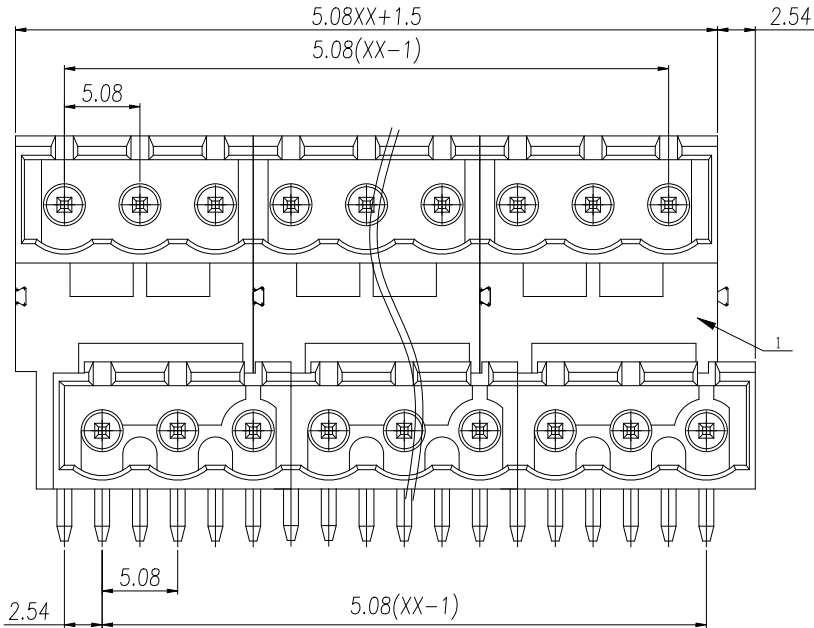

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

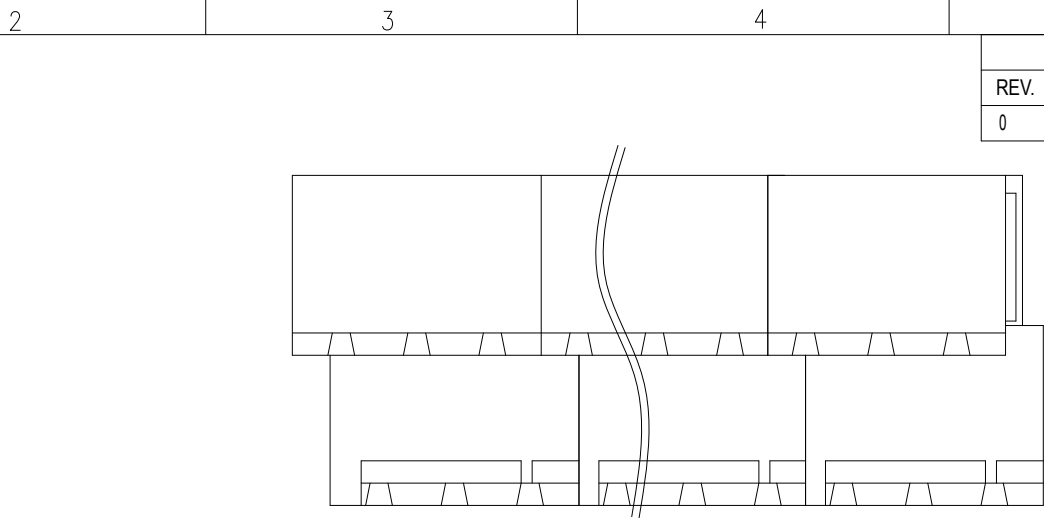

4	Pin 2	Copper Alloy	Sn Plated
3	Pin 1	Copper Alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
0	新发行		YaoFei	24.01.30

6

UL/CUL 技术参数
UL/CUL Technical Data

等级 Use Group

额定电压 Rated Voltage [V]

额定电流 Rated Current [A]

接线范围 Wire Range

单/多芯线 Solid/Stranded [AWG]

耐电压 Withstanding Voltage

IEC 技术参数
IEC Technical Data

过电压类别 Overvoltage Category

污染等级 Contamination Class

额定电压 Rated Voltage [V]

额定电流 Rated Current [A]

额定冲击电压 Impulse withstand voltage [KV]

导线截面积 Conductor cross section

硬质/柔性导线 Solid/flexible [mm²]

一般参数 Other Data

间距 Pitch /极数 Poles [mm] / [P]

工作温度 Operating temperature [°C]

焊锡温度 Soldering temperature

引针尺寸 Pin Dimensions [mm]

PCB板孔径 PCB Hole Diameter [mm]

符合RoHS环保要求

UL®us

B

C

D

A

B

C

D

300

15

-

-

10

1600V/1Min

III

III

II

3

2

2

250

320

400

10

10

10

4.0

4.0

4.0

-

5.08 / 2*4~2*24

-40~105

260°C/5S

1.0*1.0

Ø1.7

PART NO.: WJ2EDGRTC-5.08-2*XXP-1Y-00A

FOR-0371 Rev.1.0