
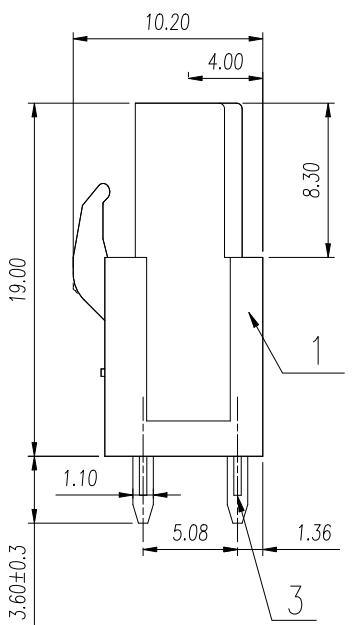


P.C.B. LAYOUT

两线时只有此
侧卡角和凹槽

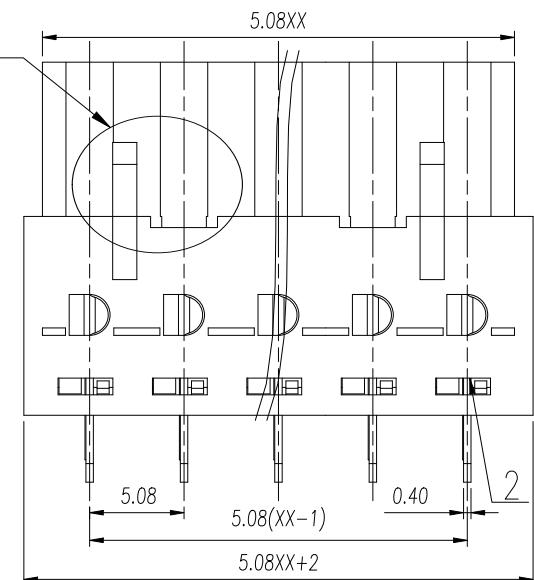

General Tolerances										<input type="checkbox"/>		
variable range	to	over 6	over 10	over 30	over 60	over 100	over 160	over 100	over 160	over 100	over 100	over 100
		to 6	to 10	to 30	to 60	to 100	to 160	to 10	to 100	to 100	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

1

2

3

4

5

FOR-0371 Rev.1.0

ITEM	NAME OF PART	MATERIAL	NOTES	DES.	YaoFei	DATE	24.01.25	UNITS	mm	THIRD ANGLE PROJECTION	D
3	Clamp	Copper Alloy	Sn Plated	CHK.	YangHJ	DATE	24.01.25	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
2	Cover	PA66	UL94V-0	APP.	JASON	DATE	24.01.25	SCALE	2:1	DRAWING TYPE: SP-03	REV 0
1	Housing	PA66	UL94V-0							PART NO.: WJ2EDGB-5.08-XXP-1Y-00A	
WANJIE 慈溪市万捷电子有限公司											



CIXI WANJIE ELECTRONIC CO., LTD

WJ2EDGB-5.08-XXP-1Y-00A

REVISION RECORD		ECN No.	APPROVED	DATE
REV.	DESCRIPTION			
0	新发行		YaoFei	24.01.25
UL/CUL 技术参数				
UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range			-
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage			1600V/1Min
IEC 技术参数				
IEC Technical Data				
过电压类别	Overshoot Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0
导线截面积	Conductor cross section			-
硬质/柔性导线	Solid/ flexible [mm ²]			
一般参数 Other Data				
间距	Pitch /极数 Poles [mm] / [P]	5.08 / 02-24		
工作温度	Operating temperature [°C]	-40~105		
焊锡温度	Soldering temperature	260°C/5S		
引针尺寸	Pin Dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	Ø1.4		
符合RoHS环保要求				



A

B

C

D