

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。 保留新型和外观专利的所有权利。

1




2

3

4

5

6

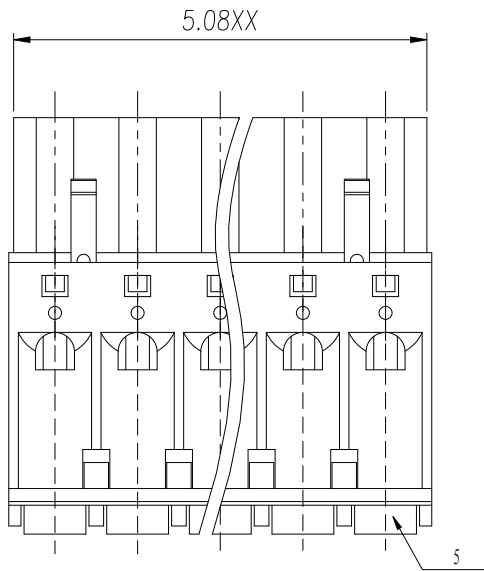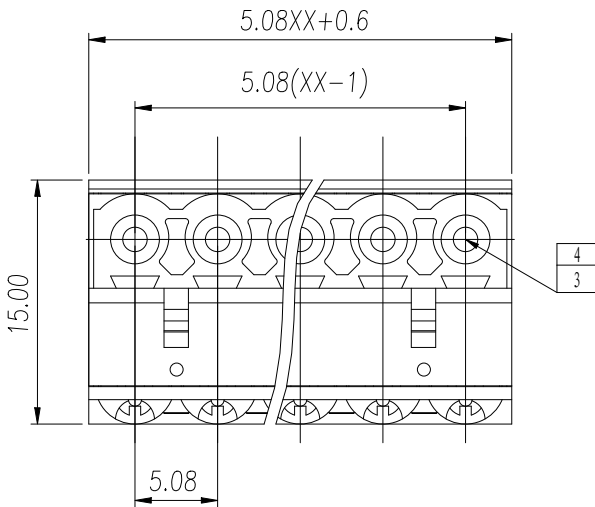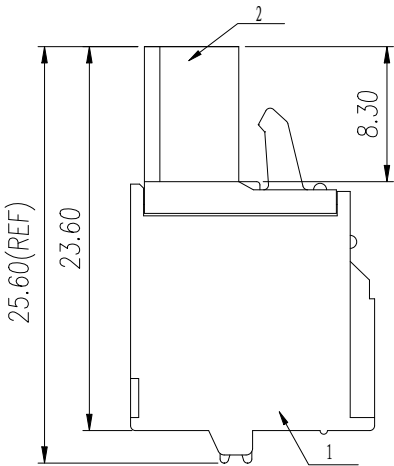

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

1

2

3

4

5	Button	Pom	UL94V-HB
4	Clamp	Copper Alloy	Sn Plated
3	Spring	Stainless Steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

5	Button	Pom	UL94V-HB
4	Clamp	Copper Alloy	Sn Plated
3	Spring	Stainless Steel	/
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	YaoFei	DATE	23.11.30	UNITS	mm	THIRD ANGLE PROJECTION		
CHK.	YangHJ	DATE	23.11.30	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1	
APP.	JASON	DATE	23.11.30	SCALE	2:1	DRAWING TYPE: SP-03	REV	0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ2EDGKD-5.08-XXP-1Y-00A		



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ2EDGKD-5.08-XXP-1Y-00A

REVISION RECORD					
REV.	DESCRIPTION		ECN No.	APPROVED	DATE
0	新发行			YaoFei	23.11.30
UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	-	300
额定电流	Rated Current	[A]	10	-	10
接线范围	Wire Range		28-12		
单/多芯线	Solid/Stranded	[AWG]			
耐电压	Withstanding Voltage		1600V/1Min		
IEC 技术参数 IEC Technical Data			IEC61984		
过电压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	250	320	630
额定电流	Rated Current	[A]	12	12	12
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0
导线截面积	Conductor cross section		0.2-2.5		
硬质/柔性导线	Solid/ flexible	[mm²]			
一般参数 Other Data					
间距	Pitch / 极数	Poles [mm] / [P]	5.08 / 02~24		
剥线长度	Stripping Length	[mm]	7~8		
工作温度	Operating temperature	[°C]	-40~105		
符合RoHS环保要求					

A

B

C

D