

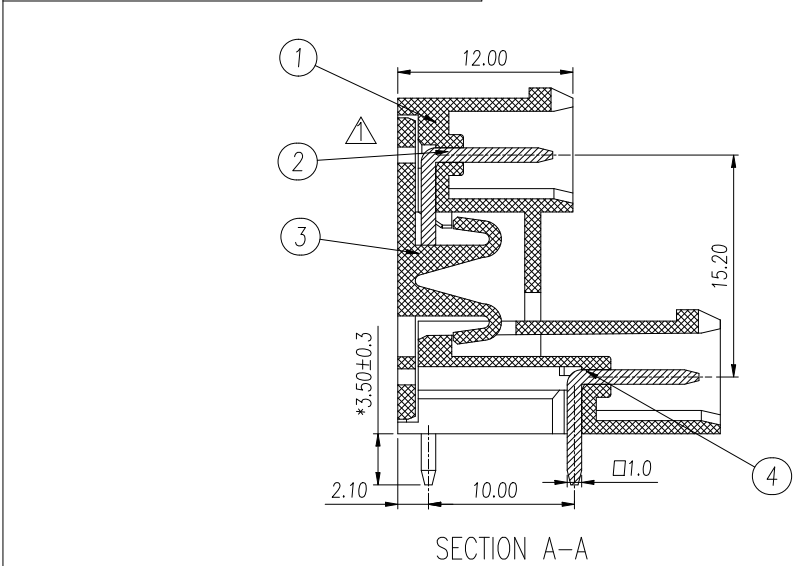


	linear dimension(Tolerances Standard GB/T 14486-2008)											fillet	chamfer		∠ short angle sid	≡	—	▧	//	⊥			
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.45	±0.57	±0.72	±0.88	±1.05	±1.25	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

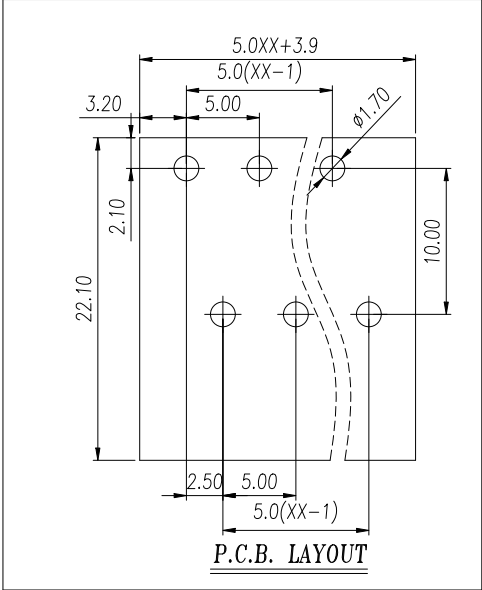

△	变更为新料号		余陈泽	24.09.24
△	按照规范去掉识别点	2017061301	许斌	17.07.10
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
REVISION		RECORD		

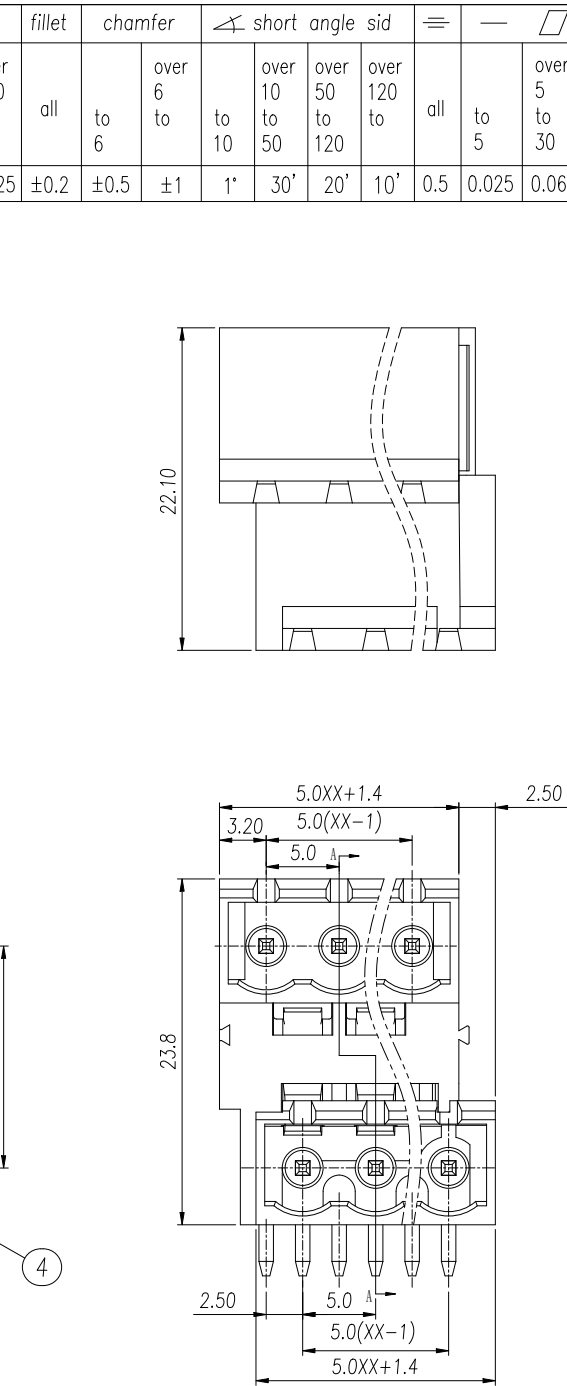

4	短针	01056B00040	XX	黄铜	镀亮锡
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

UL/CUL	技术 参数	UL®		
UL/CUL	Technical Data	UL®		
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围	Wire Range	-		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	1600V/1Min		
IEC 技术参数	IEC Technical Data	IEC61984		
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4.0	4.0	4.0
导线截面积	Conductor cross section	-		
硬质/柔性导线	Solid/ flexible [mm²]			
材料	Material			
绝缘材料	Insulation Material	PA		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactur Material	铜合金 Copper alloy		
导体镀层	Contactive Coating	镀锡 Sn Plated		
一般参数	Other Data			
间距	Pitch [mm]	5.0		
极数	Poles [P]	2*02P~2*03P		
剥线长度	Stripping Length [mm]	-		
螺丝	Screw	-		
扭矩	Torque(Max) [N.m]	-		
工作温度	Operating temperature [°C]	-40~105		

3	盖板	01056CYY(2*XX)A	1	PA66	UL94V-0
2	长针	01056B000.30	XX	黄铜	镀亮锡
1	主体	01056PYY(2*XX)A	1	PA66	UL94V-0
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	史哲文	DATE	12.12.14	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	5:2
				DWG NO.	SP-02-1056C02
				TITLE	WJ2EDGRTC-5.0-2*XXP-1Y-00A
					WJ2EDGRTC-5.0-2~3P



CIXI WANJIE ELECTRONIC CO., LTD