
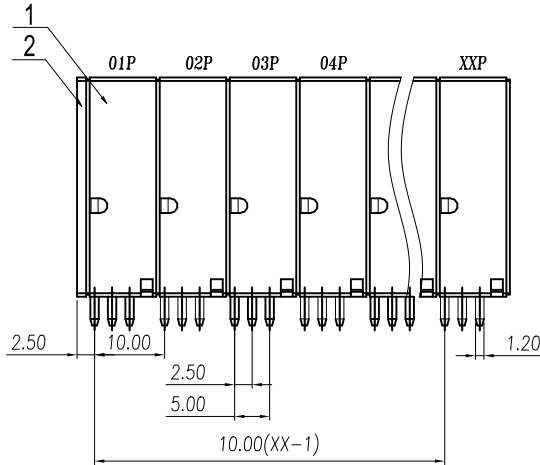
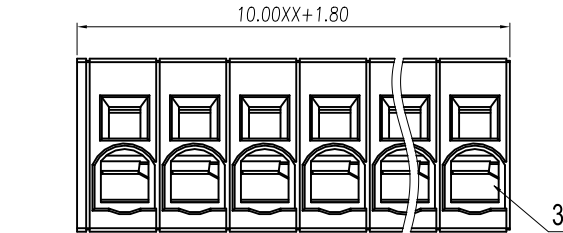
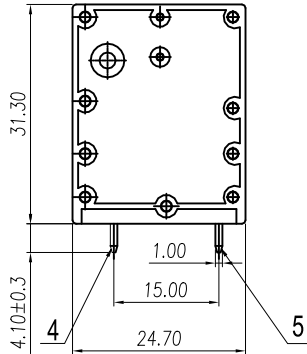


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。 侵犯者将承担侵权责任。 本公司保留对涉及发明、实用新型和外观设计的所有权利。

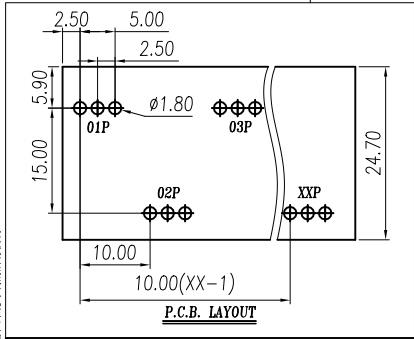

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

5	Front Header	Copper Alloy	Sn Plated
4	Rear Header	Copper Alloy	Sn Plated
3	Spring	Stainless Steel	-
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	23.12.04	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	23.12.04	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	23.12.04	SCALE	1:1	DRAWING TYPE: SP-03	REV V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ239V-10.0-XXP-1Y-00A	

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	23.12.04

UL/CUL 技术参数		UL/CUL Technical Data			cUL®us	
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	600	600	600	
额定电流	Rated Current	[A]	66	66	5	
接线范围	Wire Range		18~4			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		2200V/1Min			
IEC 技术参数			IEC60947-7-4			
IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	1000	1000	1000	
额定电流	Rated Current	[A]	76	76	76	
额定冲击电压	Impulse withstand voltage	[KV]	8.0	8.0	6.0	
导线截面积	Wire cross section		0.75~16			
硬质/柔性导线	Solid/ flexible	[mm²]				
材 料			Material			
绝缘材料	Insulation Material		PA66			
阻燃等级	Flammability		UL94V-0			
导体材料	Conductor Material		铜合金 Copper alloy			
导体表面镀层	Conductor Plating		镀锡 Sn Plated			
一般参数			Other Data			
间距	Pitch /极数 Poles	[mm] / [P]	10.0/02~12			
剥线长度	Stripping Length	[mm]	18			
螺丝	Screw/扭矩 Torque(Max)	[N.m]	/			
工作温度	Operating temperature	[°C]	-40~105			
焊锡温度	Soldering temperature	[°C]	260℃/5S			
引针尺寸	Pin Dimensions	[mm]	1.2*1.0			
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.8			

1

2

3

4

5

FOR-0371 Rev.1.0