
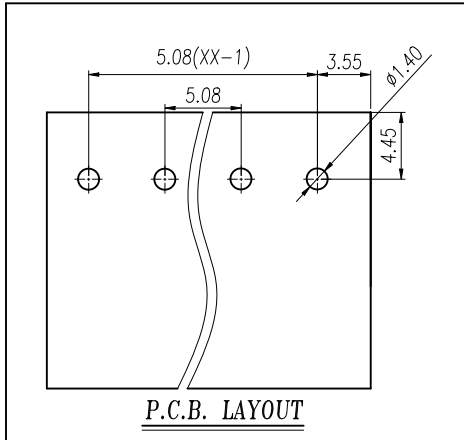


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担赔偿责任。侵权者将承担赔偿责任。

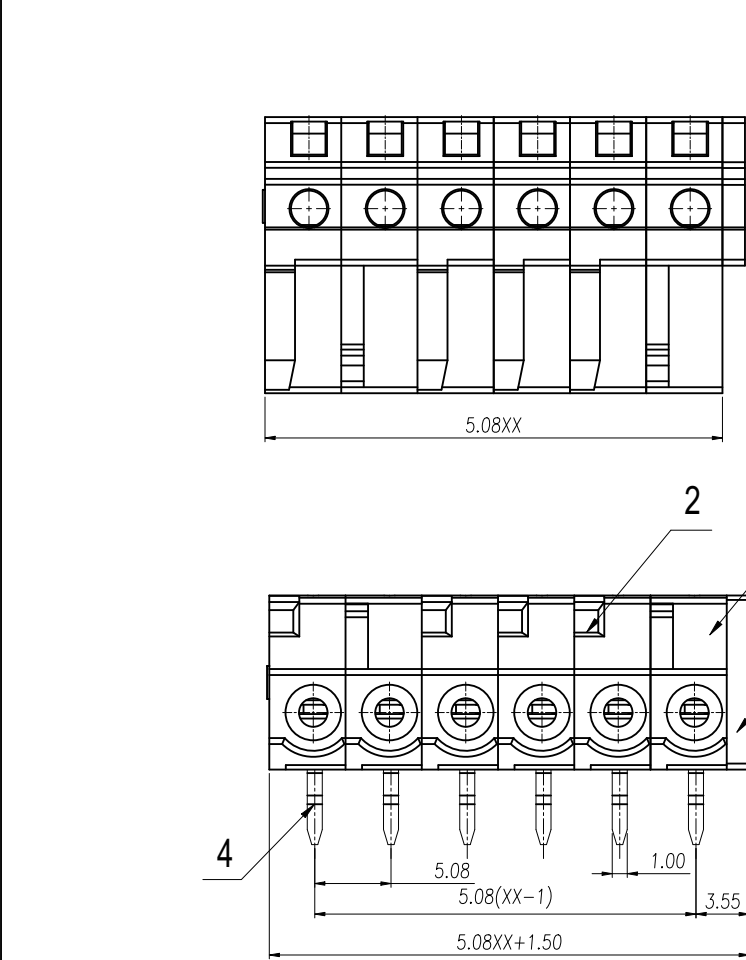

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

4	Pin Header	Copper Alloy	Sn Plated
3	Cover	PA66	UL94V-0
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

REVISION RECORD																																	
REV.	ESCRPTION			ECN No.	APPROVED	DATE																											
V0	新发行				ZhaoXY	24.01.23																											
UL/CUL 技术参数 UL/CUL Technical Data  <table><tr><td>等 级</td><td>Use Group</td><td>B</td><td>C</td><td>D</td></tr><tr><td>额定电压</td><td>Rated Voltage [V]</td><td>300</td><td>-</td><td>300</td></tr><tr><td>额定电流</td><td>Rated Current [A]</td><td>15</td><td>-</td><td>10</td></tr><tr><td>接线范围</td><td>Wire Range</td><td colspan="3" rowspan="2">/</td></tr><tr><td>单/多芯线</td><td>Solid/Stranded [AWG]</td></tr><tr><td>耐电压</td><td>Withstanding Voltage</td><td colspan="3">1600V/1Min</td></tr></table>				等 级	Use Group	B	C	D	额定电压	Rated Voltage [V]	300	-	300	额定电流	Rated Current [A]	15	-	10	接线范围	Wire Range	/			单/多芯线	Solid/Stranded [AWG]	耐电压	Withstanding Voltage	1600V/1Min					
				等 级	Use Group	B	C	D																									
				额定电压	Rated Voltage [V]	300	-	300																									
				额定电流	Rated Current [A]	15	-	10																									
				接线范围	Wire Range	/																											
				单/多芯线	Solid/Stranded [AWG]																												
				耐电压	Withstanding Voltage	1600V/1Min																											
				IEC 技术参数				IEC61984																									
				IEC Technical Data																													
				过电压类别	Overvoltage Category	III	III	II																									
污染等级	Contamination Class	3	2	2																													
额定电压	Rated Voltage [V]	320	320	630																													
额定电流	Rated Current [A]	12	12	10																													
额定冲击电压	Impulse withstand voltagea [KV]	4.0	4.0	4.0																													
导线截面积	Conductor cross section	/																															
硬质/柔性导线	Solid/ flexible [mm²]																																
材 料				Material																													
绝缘材料	Insulation Material	PA66																															
阻燃等级	Imflammability	UL94V-0																															
导体材料	Contacto Material	铜合金 Copper alloy																															
导体表面镀层	Contactive Coating	镀锡 Sn Plated																															
一般参数				Other Data																													
间距	Pitch / 极数	Poles [mm] / [P]	5.08 / 02~24																														
工作温度	Operating temperatur	[°C]	-40~105																														
焊锡温度	Soldering temperature	260°/5S																															
引针尺寸	Pin Dimensions	[mm]	0.6*1.0																														
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.4																														

ZhaoXY	DATE	24.01.23	UNITS	mm	THIRD ANGLE PROJECTION	
HuHT	DATE	24.01.23	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
Jason	DATE	24.01.23	SCALE	2:1	DRAWING TYPE: SP-03	REV V0

 慈 溪 市 万 捷 电 子 有 限 公 司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ0505-04XX-1Y-00A