
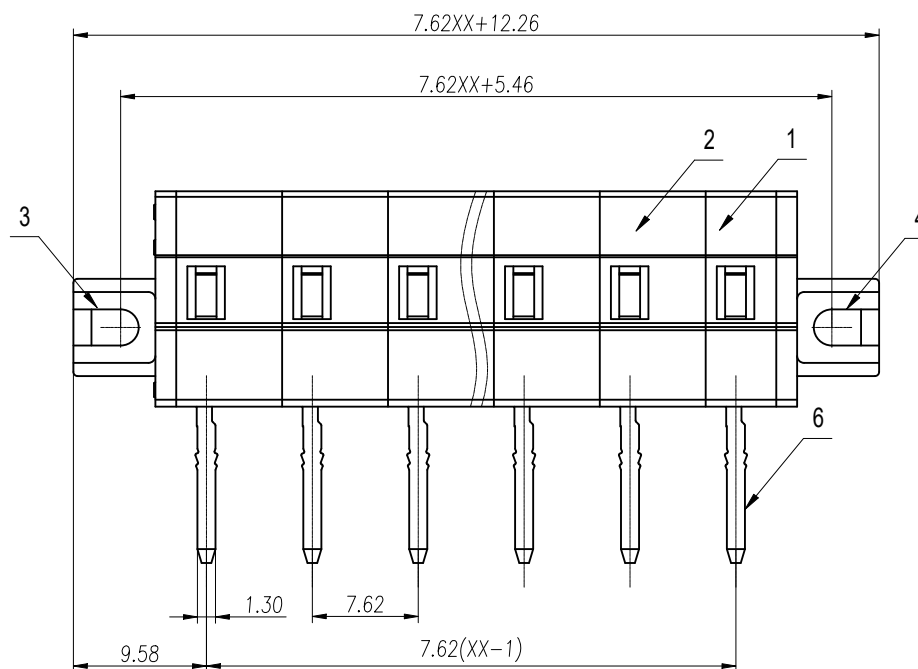
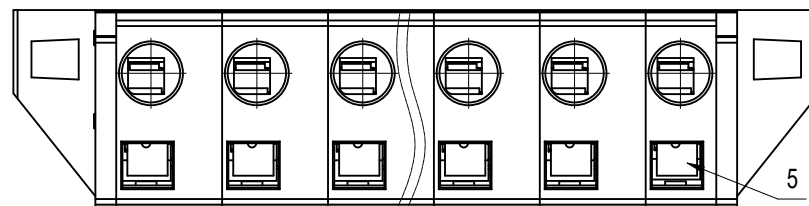


General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

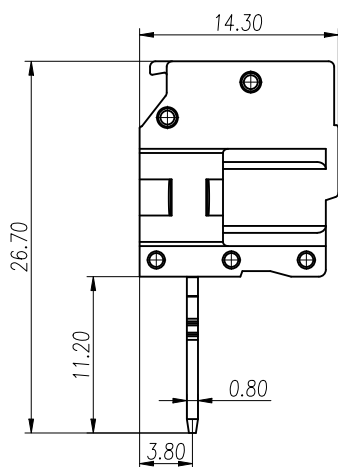

REVISION RECORD										
REV.	ESCRPTION				ECN No.	APPROVED	DATE			
V0	新发行					WangZF	24.12.06			
4	UL/CUL 技术参数									
	UL/CUL Technical Data									
	等 级	Use Group				B	C	D		
	额定电压	Rated Voltage [V]				300	-	300		
	额定电流	Rated Current [A]				15	-	10		
	接线范围	Wire Range				28-12				
	单/多芯线	Solid/Stranded [AWG]								
	耐电压	Withstanding Voltage				1600V/1Min				
	IEC 技术参数				IEC61984					
	IEC Technical Data									
	过电压类别	Overvoltage Category				III	III	II		
	污染等级	Contamination Class				3	2	2		
	额定电压	Rated Voltage [V]				320	320	630		
	额定电流	Rated Current [A]				12	12	12		
	额定冲击电压	Impulse withstand voltagea [KV]				4	4	4		
	导线截面积	Conductor cross section				0.25-2.5				
	硬质/柔性导线	Solid/ flexible [mm²]								
	材 料				Material					
	绝缘材料	Insulation Material				PA66				
	阻燃等级	Imflammability				UL94V-0				
	导体材料	Contactor Material				铜合金 Copper alloy				
	导体表面镀层	Contactive Coating				镀锡 Sn Plated				
	一般参数				Other Data					
间距 Pitch / 极数 Poles	[mm] / [P]				7.62 / 02~24					
工作温度	Operating temperatur [°C]				-40~105					
剥线长度	Stripping Length [mm]				8-9					
焊锡温度	Soldering temperature				260°C/5S					
引针尺寸	Pin Dimensions [mm]				1.3*0.8					
PCB板孔径	PCB Hole Diameter [mm]				Ø1.8					
WangZF	DATE	24.12.06	UNITS	mm	THIRD ANGLE PROJECTION					
HuHT	DATE	24.12.06	SIZE	A4	TYPE: CUSTOMER DRAWING			SHEET 1 of 1		
Jason	DATE	24.12.06	SCALE	2:1	DRAWING TYPE: SP-03			REV	V0	
 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					PART NO.: WJ0704-03XX-1Y-00A					