




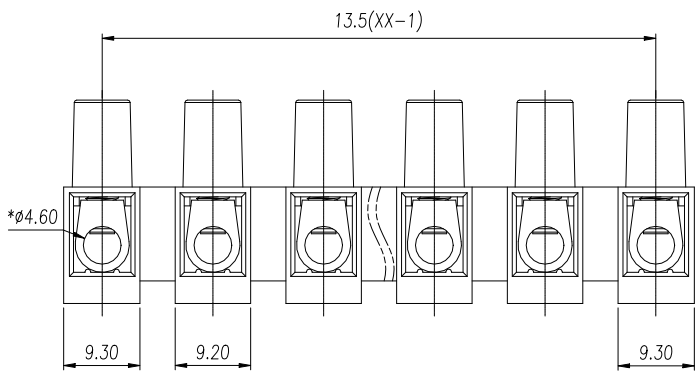

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

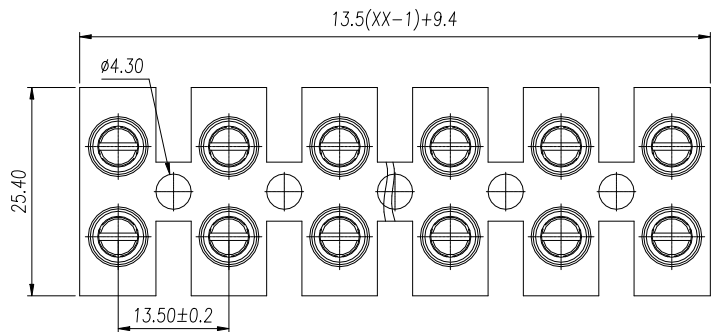

参考标准/ Standard	UL	IEC
额定电压/ Rated voltage	600V	750V
额定电流/ Rated current	50A	57A
接触电阻/ Contact resistance	20mΩ	
绝缘电阻/ Insulation resistance	500MΩ/DC500V	
使用线径/ Wire range	20~8AWG	10mm ²
耐电压/ With standing voltage	AC 2500V/1 Min	
机械性能/ Mechanical		
扭矩/ Torque	1.2Nm/10.8Lb.in	
温度范围/ Temp.Range	-40°C~+105°C	
剥线长度/ Strip Length	6-7mm	
尺寸/ Dimensions		
间距/ Pitch	13.5mm	
极数/ Poles	2~12p	
材质及电镀/ Material		
塑件/ Housing	PA66, UL94V-2	
螺丝/ Screws	M4.0 Steel, Zn plated	
铜柱/ Copper Cylinder	Copper alloy, Ni plated	
弹片/ Wire guard	Stainless steel	

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 100	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/ UNITS	mm	尺寸/ SIZE	A4	比例/ SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/ REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称/ TITLE	MY14HW-1.2-13.5-XXP-1Y-00A	