


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 未经书面许可, 复制或传播本文件内容, 或在本文件内容基础上进行发明、实用新型或外观设计, 均属于侵权行为, 侵权者将承担相关法律责任。本公司保留所有权利。

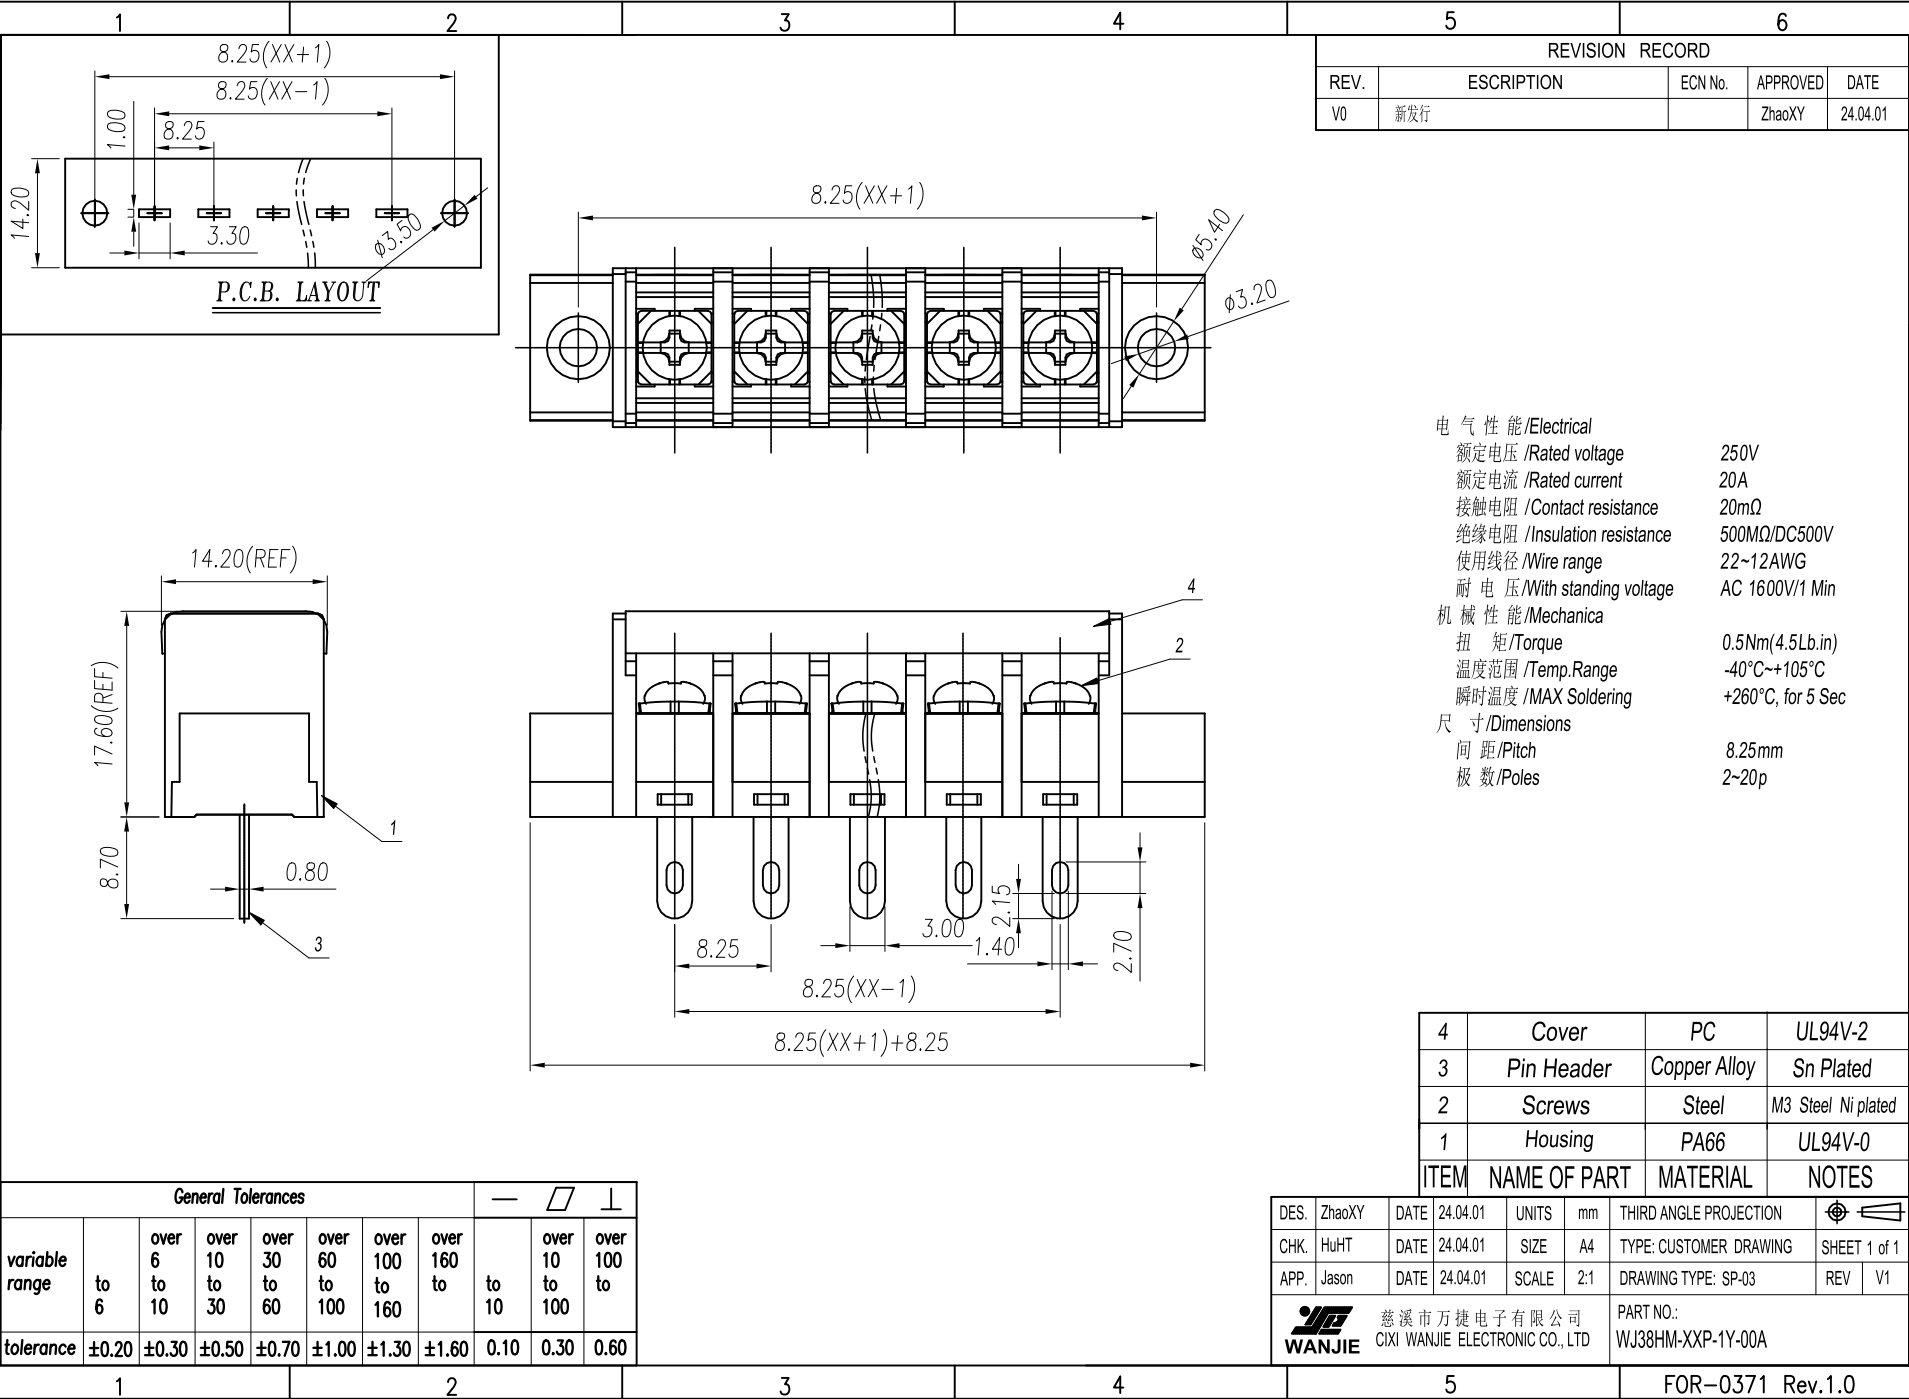

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical
额定电压 /Rated voltage 250V
额定电流 /Rated current 20A
接触电阻 /Contact resistance 20mΩ
绝缘电阻 /Insulation resistance 500MΩ/DC500V
使用线径 /Wire range 22~12AWG
耐电压 /With standing voltage AC 1600V/1 Min
机械性能/Mechanica
扭 矩/Torque 0.5Nm(4.5Lb.in)
温度范围 /Temp.Range -40°C~+105°C
瞬时温度 /MAX Soldering +260°C, for 5 Sec
尺 寸/Dimensions
间 距/Pitch 8.25mm
极 数/Poles 2~20p

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ38HM-XXP-1Y-00A	