


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文档的内容。 侵犯者将承担侵权责任。 本公司保留对外专利的所有权利。

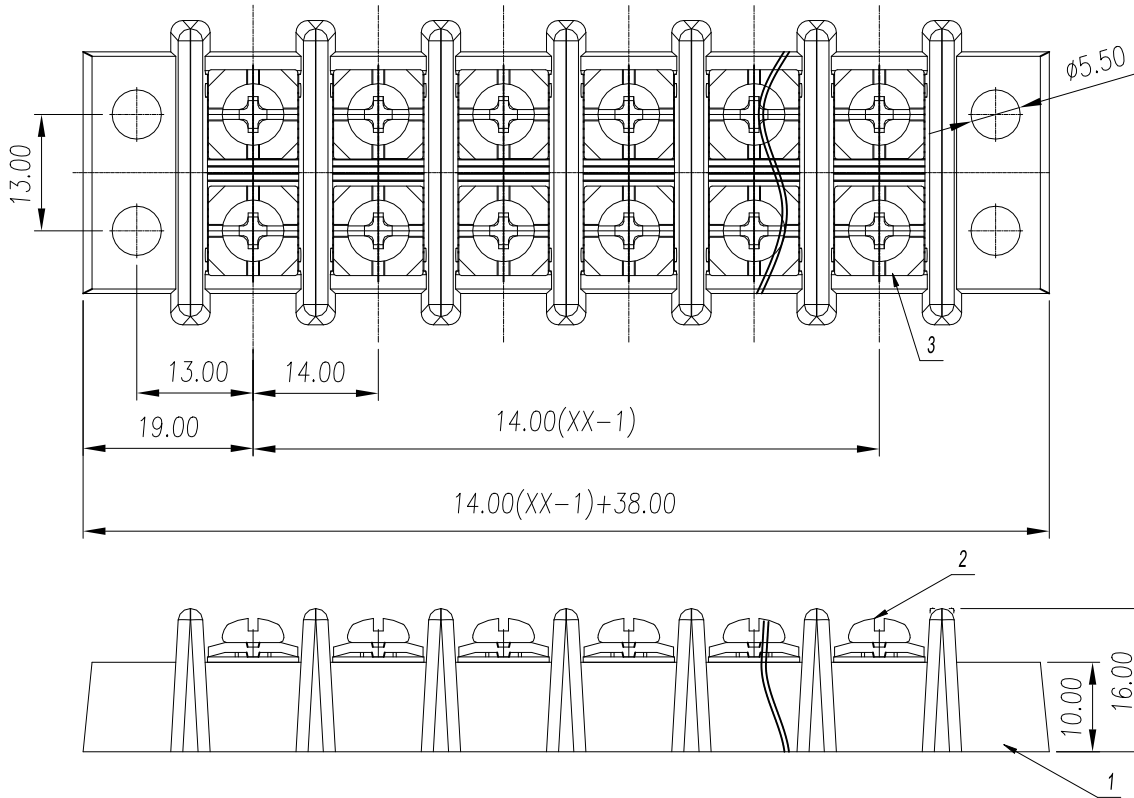

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/ Electrical

额定电压/ Rated voltage	600V
额定电流/ Rated current	30A
接触电阻/ Contact resistance	20mΩ
绝缘电阻/ Insulation resistance	500MΩ/DC500V
使用线径/ Wire range	22~10AWG
耐电压/ Wrth standing voltage	AC 2200V/1 Min

机械性能/ Mechanical

扭矩/ Torque	1.2Nm(10.6Lb.in)
温度范围/ Temp.Range	-40°C~+105°C
瞬时温度/ MAX Soldering	+260°C, for 5 Sec

尺寸/ Dimensions

间距/ Pitch	14mm
极数/ Poles	2~22p

3	current-carrying part	Copper Alloy	Ni Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

PART NO.:
WJ89M-XXP-1Y-00A

General Tolerances

								—	∠	⊥
variable range	to	over	over	over	over	over	over	to	over	over
	6	10	30	60	100	160	to	10	100	100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

FOR-0371 Rev.1.0