
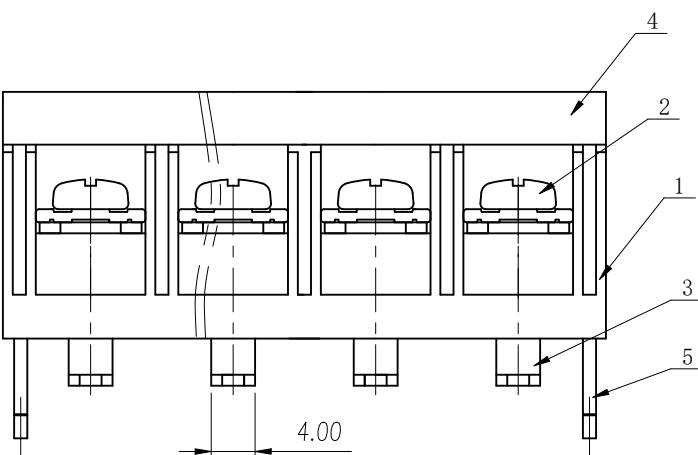
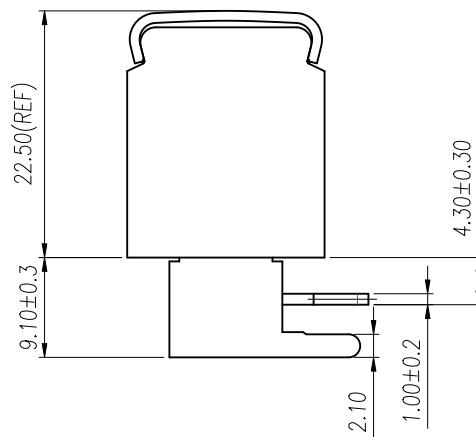
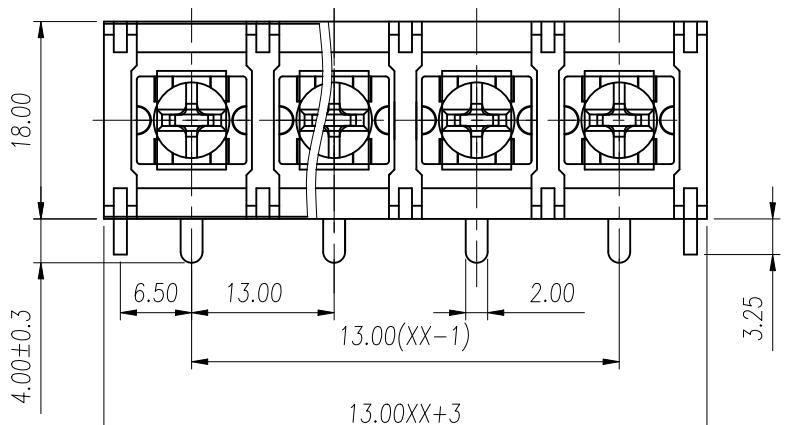


| REVISION RECORD | | | | |
|-----------------|-------------|---------|----------|----------|
| REV. | DESCRIPTION | ECN No. | APPROVED | DATE |
| V0 | 新发行 | | WangZF | 25.11.12 |

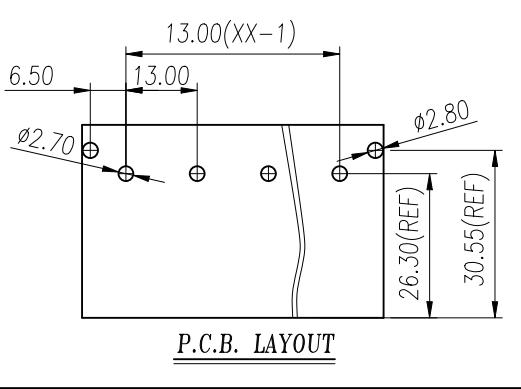

电气性能/Electrical

| | |
|-----------------------------|----------------|
| 额定电压/Rated voltage | 600V |
| 额定电流/Rated current | 40A |
| 接触电阻/Contact resistance | 20mΩ |
| 绝缘电阻/Insulation resistance | 500MΩ/DC500V |
| 使用线径/Wire range | 18-10AWG |
| 耐 电 压/Wrth standing voltage | AC 2200V/1 Min |

机械性能/Mechanical

| | |
|--------------------|-------------------|
| 扭 矩/Torque | 1.2Nm |
| 温度范围/Temp.Range | -40°C~+105°C |
| 瞬时温度/MAX Soldering | +260°C, for 5 Sec |

尺寸/Dimensions

间距/Pitch 13.0mm
极数/Poles 02-20P

| ITEM | NAME OF PART | MATERIAL | NOTES |
|------|--------------|--------------|--|
| 5 | Pin Header2 | Copper Alloy | Sn Plated |
| 4 | Cover | PC | UL94V-2 |
| 3 | Pin Header1 | Copper Alloy | Sn Plated |
| 2 | Screws | Steel | M4 Steel Ni plated with rust preventing oil |
| 1 | Housing | PA66 | UL94V-0 |

| | | | | | | | |
|------|--------|------|----------|-------|-----|------------------------|---|
| DES. | WangZF | DATE | 25.11.12 | UNITS | mm | THIRD ANGLE PROJECTION |  |
| CHK. | HuHT | DATE | 25.11.12 | SIZE | A4 | TYPE: CUSTOMER DRAWING | SHEET 1 of 1 |
| APP. | Jason | DATE | 25.11.12 | SCALE | 2:1 | DRAWING TYPE: SR 02 | REV. V1 |

深圳市万捷电子有限公司
XI WAN.JIE ELECTRONIC CO., LTD

| General Tolerances | | | | | | | | — | ◻ | + |
|--------------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range | to 6 | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance | ±0.20 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±1.60 | 0.10 | 0.30 | 0.60 |