


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All non-patentable rights reserved for patent, utility model or designs registrations. 除非事先明确授权，否则禁止转让、复制、利用、或就本文件的内容，侵犯者负赔偿责任。本公司保留专利和外观设计的所有权利。

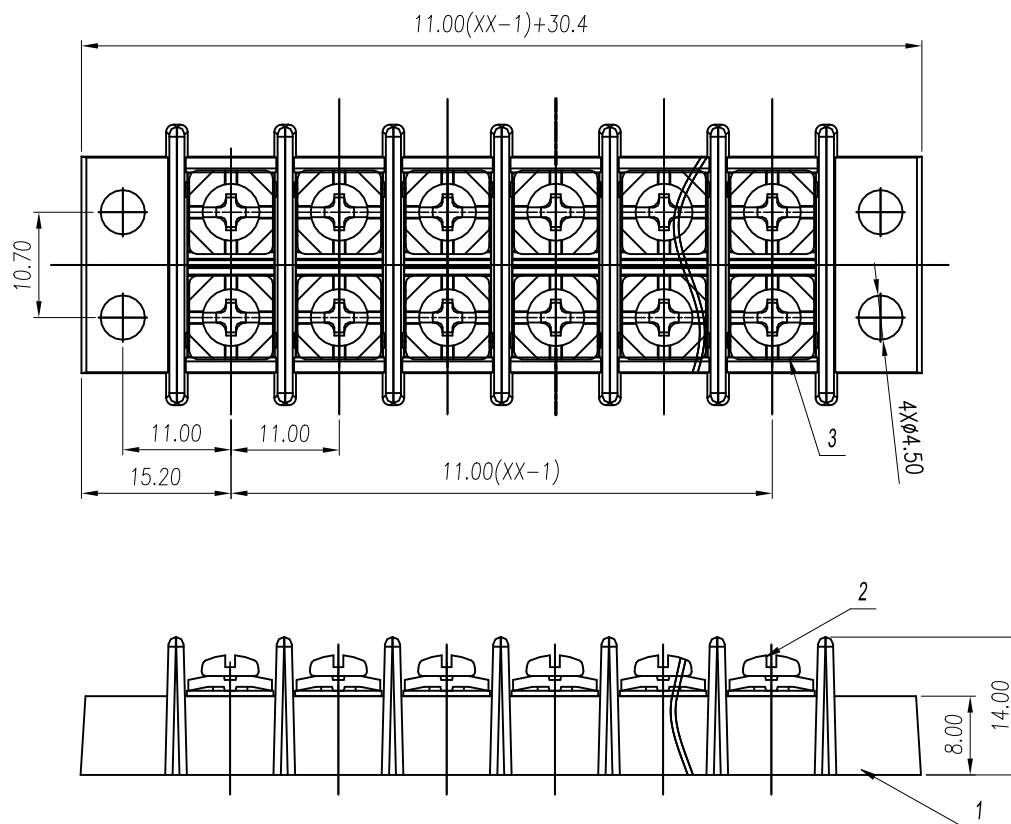

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical

额定电压 /Rated voltage	300V
---------------------	------

额定电流 / Rated current	25A
----------------------	-----

接触电阻 / Contact resistance	20mΩ
---------------------------	------

绝缘电阻 /Insulation resistance 500MΩ/DC500V

使用线径 / Wire range 22~12AWG

耐电压/With standing voltage

机械性能/Mechanica

扭 矩/Torque 0.8Nm(7.0Lb.in)

温度范围 /Temp.Range	-40°C~+105°C
------------------	--------------

瞬时温度 / MAX Soldering

尺寸/Dimensions

间距/Pitch

极数/Poles 2~26p

收 款 人: 2009

3	current-carrying part	Copper Alloy	Ni Plated
2	Screws	Steel	M3.5 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1

 慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	PART NO.: WJ69M-XXP-1Y-00A
--	-------------------------------

General Tolerances								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

1

2

3

4

5

FOR-0371 Rev.1.0