
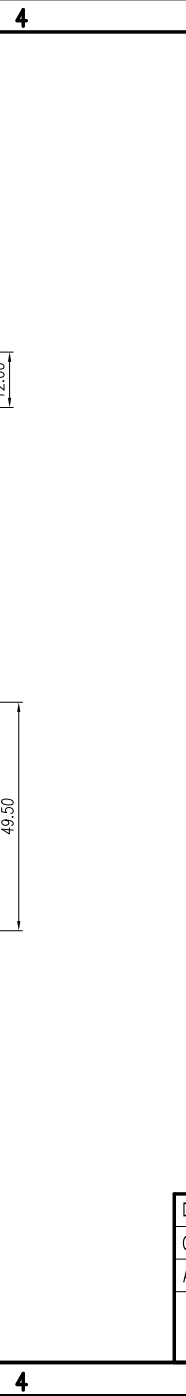
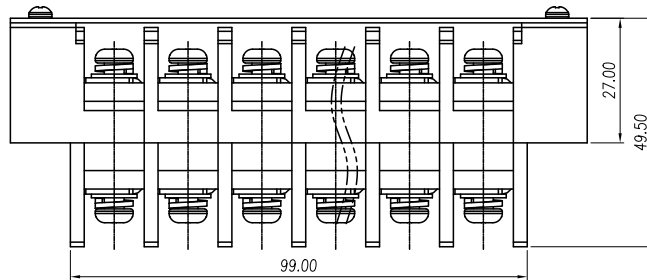
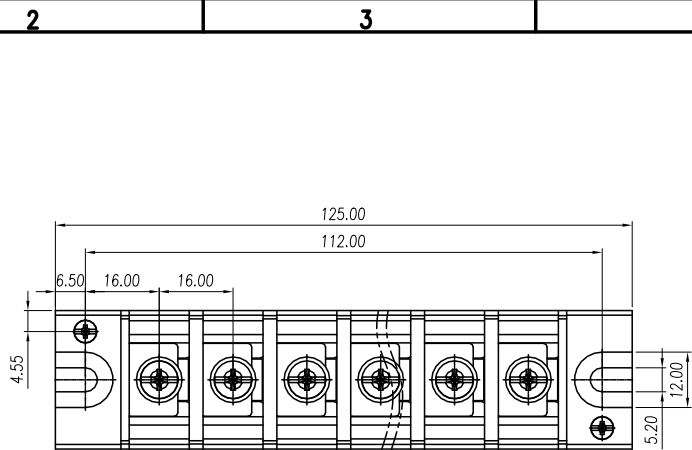



Transfer or duplication of this document or part or its contents on printed or electronic media without the written permission of the copyright owner is prohibited. Any unauthorized use of this document or its contents is prohibited. The copyright owner shall not be liable for compensation. All rights reserved for patent, utility model or design registration. 此文件为内部技术资料，未经许可，不得复制或传播。任何未经授权的使用本文件或其内容均是被禁止的。版权所有者将不承担任何赔偿责任。



5

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电 气 性 能 /Electrical

额定电压 /Rated voltage 600V

额定电流 /Rated current 65A

接触电阻 /Contact resistance 20mΩ

绝缘电阻 /Insulation resistance 1000MΩ/DC500V

使用线径 /Wire range 14~6AWG

耐 电 压 /With standing voltage AC 2200V/1 Min

机 械 性 能 /Mechanica

扭 矩 /Torque 2.5N.m

温度范围 /Temp.Range -40°C~+130°C

瞬时温度 /MAX Soldering +260°C, for 5 Sec

尺 寸 /Dimensions

间 距 /Pitch 16.0mm

极 数 /Poles 01~15p

6

5	Cover	PC	UL94V-2
4	Nut	Steel	M5 Steel Zn plated
3	Current carrier	Copper Alloy	Sn Plated
2	Screws	Steel	M5 Steel Zn plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

General Tolerances								— □ ⊥		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ10L-16.0-XXP-1Y-00A	

FOR-0371 Rev.1.0