
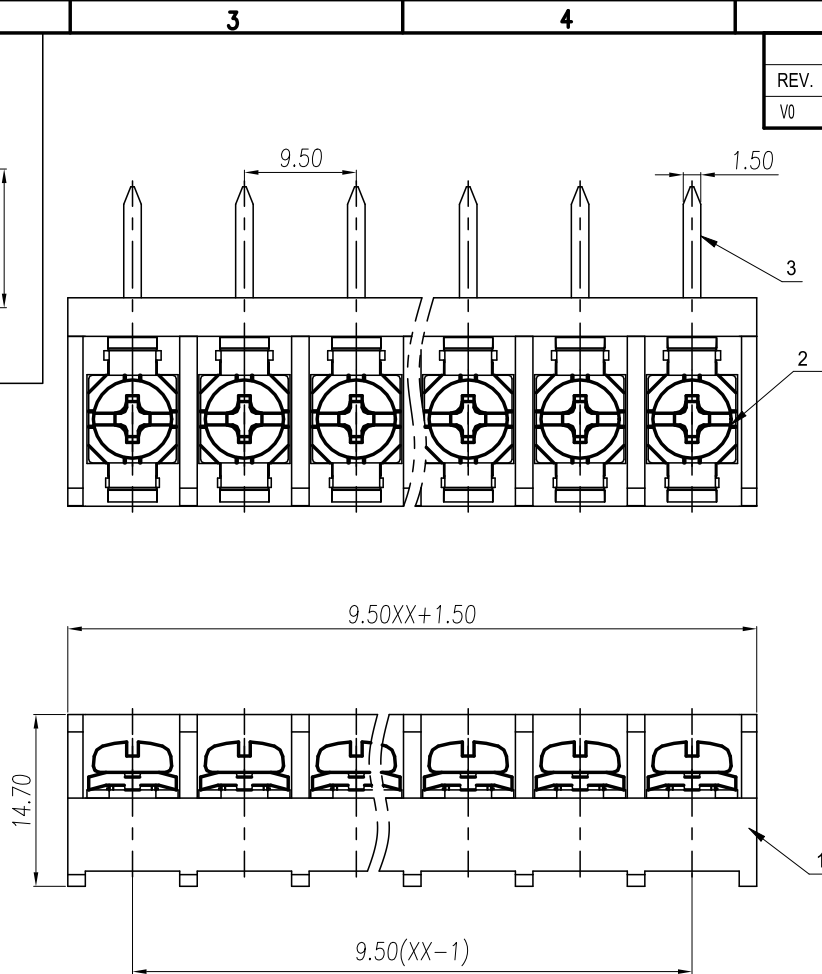
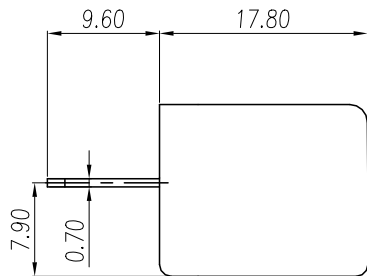


Transfer or duplication of this document or part or its contents are prohibited unless explicit authorization is granted. Violation will be liable for compensation. All rights reserved for patent, utility model or design registrations. 未经许可复制或传播本文件及其内容，侵权者将承担法律责任。本公司保留所有权利，未经许可复制或传播本文件及其内容，侵权者将承担法律责任。

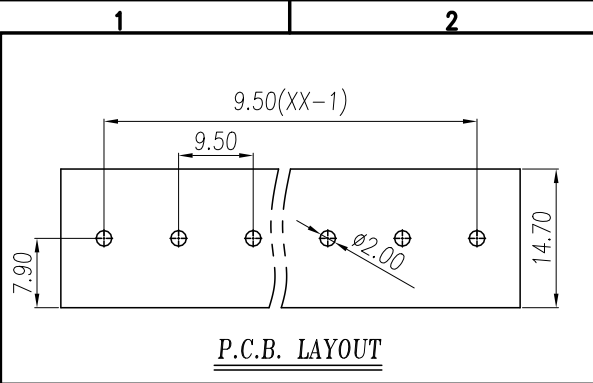

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
V0	新发行		ZhaoXY	24.04.01

电气性能/Electrical	
额定电压/Rated voltage	300V
额定电流/Rated current	25A
接触电阻/Contact resistance	20mΩ
绝缘电阻/Insulation resistance	500MΩ/DC500V
使用线径/Wire range	22~12AWG
耐电压/With standing voltage	AC 1600V/1 Min
机械性能/Mechanica	
扭矩/Torque	1.2Nm(10.6Lb.in)
温度范围/Temp.Range	-40°C~+105°C
瞬时温度/MAX Soldering	+260°C, for 5 Sec
尺寸/Dimensions	
间距/Pitch	9.5mm
极数/Poles	2~20p

3	Pin Header	Copper Alloy	Sn Plated
2	Screws	Steel	M4 Steel Ni plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

General Tolerances								— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

DES.	ZhaoXY	DATE	24.04.01	UNITS	mm	THIRD ANGLE PROJECTION	
CHK.	HuHT	DATE	24.04.01	SIZE	A4	TYPE: CUSTOMER DRAWING	SHEET 1 of 1
APP.	Jason	DATE	24.04.01	SCALE	2:1	DRAWING TYPE: SP-03	REV V1
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						PART NO.: WJ46A-XXP-1Y-00A	

FOR-0371 Rev.1.0